

RETURN WITH BID



Local Public Agency  
Formal Contract  
Proposal

PROPOSAL SUBMITTED BY		
Contractor's Name		
Street	P.O. Box	
City	State	Zip Code

STATE OF ILLINOIS

COUNTY OF Grundy  
Norman Township  
(Name of City, Village, Town or Road District)

FOR THE IMPROVEMENT OF  
STREET NAME OR ROUTE NO. TR 93 Greer Road  
SECTION NO. 10-14111-00-BR  
TYPES OF FUNDS TBP

SPECIFICATIONS (required)

PLANS (required)

**For Municipal Projects**  
Submitted/Approved/Passed

Mayor  President of Board of Trustees  Municipal Official

\_\_\_\_\_

Date

**Department of Transportation**

Released for bid based on limited review

\_\_\_\_\_

Regional Engineer

\_\_\_\_\_

Date

**For County and Road District Projects**

Submitted/Approved

Brad Baker  
Highway Commissioner

6/6/16  
Date

Submitted/Approved

G. Cassin  
County Engineer/Superintendent of Highways

6/6/16  
Date

Note: All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed.

RETURN WITH BID

NOTICE TO BIDDERS

County Grundy
Local Public Agency Norman
Section Number 10-14111-00-BR
Route TR 93 Greer Road

Sealed proposals for the improvement described below will be received at the office of Grundy County Highway Dept.,
245 N. Rt. 47 Morris, Illinois 60450 until 10:00 AM on June 23, 2016

Sealed proposals will be opened and read publicly at the office of Grundy County Highway Dept.
245 N. Rt. 47 Morris, Illinois 60450 at 10:00 AM on June 23, 2016

DESCRIPTION OF WORK

Name Greer Road Bridge Length: 300.00 feet ( 0.06 miles)
Location Greer Road over Bills Run 1/2 mile west of Verona Road in Norman Township
Proposed Improvement Remove existing tank car and construct new bridge

1. Plans and proposal forms will be available in the office of Grundy County Highway Department
245 N. Rt. 47 Morris, Illinois 60450

2. [X] Prequalification
If checked, the 2 low bidders must file within 24 hours after the letting an "Affidavit of Availability" (Form BC 57), in duplicate, showing all uncompleted contracts awarded to them and all low bids pending award for Federal, State, County, Municipal and private work. One original shall be filed with the Awarding Authority and one original with the IDOT District Office.

3. The Awarding Authority reserves the right to waive technicalities and to reject any or all proposals as provided in BLRS Special Provision for Bidding Requirements and Conditions for Contract Proposals.

4. The following BLR Forms shall be returned by the bidder to the Awarding Authority:
a. BLR 12200: Local Public Agency Formal Contract Proposal
b. BLR 12200a Schedule of Prices
c. BLR 12230: Proposal Bid Bond (if applicable)
d. BLR 12325: Apprenticeship or Training Program Certification (do not use for federally funded projects)
e. BLR 12326: Affidavit of Illinois Business Office

5. The quantities appearing in the bid schedule are approximate and are prepared for the comparison of bids. Payment to the Contractor will be made only for the actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as hereinafter provided.

6. Submission of a bid shall be conclusive assurance and warranty the bidder has examined the plans and understands all requirements for the performance of work. The bidder will be responsible for all errors in the proposal resulting from failure or neglect to conduct an in depth examination. The Awarding Authority will, in no case be responsible for any costs, expenses, losses or changes in anticipated profits resulting from such failure or neglect of the bidder.

7. The bidder shall take no advantage of any error or omission in the proposal and advertised contract.

8. If a special envelope is supplied by the Awarding Authority, each proposal should be submitted in that envelope furnished by the Awarding Agency and the blank spaces on the envelope shall be filled in correctly to clearly indicate its contents. When an envelope other than the special one furnished by the Awarding Authority is used, it shall be marked to clearly indicate its contents. When sent by mail, the sealed proposal shall be addressed to the Awarding Authority at the address and in care of the official in whose office the bids are to be received. All proposals shall be filed prior to the time and at the place specified in the Notice to Bidders. Proposals received after the time specified will be returned to the bidder unopened.

9. Permission will be given to a bidder to withdraw a proposal if the bidder makes the request in writing or in person before the time for opening proposals.

RETURN WITH BID

PROPOSAL

County Grundy
Local Public Agency Norman
Section Number 10-14111-00-BR
Route TR 93 Greer Road

1. Proposal of \_\_\_\_\_
for the improvement of the above section by the construction of a new bridge.


a total distance of 300.00 feet, of which a distance of 300.00 feet, ( 0.057 miles) are to be improved.

- 2. The plans for the proposed work are those prepared by Chamlin & Associates, Inc. and approved by the Department of Transportation on May 27, 2016
3. The specifications referred to herein are those prepared by the Department of Transportation and designated as "Standard Specifications for Road and Bridge Construction" and the "Supplemental Specifications and Recurring Special Provisions" thereto, adopted and in effect on the date of invitation for bids.
4. The undersigned agrees to accept, as part of the contract, the applicable Special Provisions indicated on the "Check Sheet for Recurring Special Provisions" contained in this proposal.
5. The undersigned agrees to complete the work within 40 working days or by \_\_\_\_\_ unless additional time is granted in accordance with the specifications.
6. A proposal guaranty in the proper amount, as specified in BLRS Special Provision for Bidding Requirements and Conditions for Contract Proposals, will be required. Bid Bonds will be allowed as a proposal guaranty. Accompanying this proposal is either a bid bond if allowed, on Department form BLR 12230 or a proposal guaranty check, complying with the specifications, made payable to:

County \_\_\_\_\_ Treasurer of Grundy County
The amount of the check is \_\_\_\_\_ ( \_\_\_\_\_ ).

- 7. In the event that one proposal guaranty check is intended to cover two or more proposals, the amount must be equal to the sum of the proposal guaranties, which would be required for each individual proposal. If the proposal guaranty check is placed in another proposal, it will be found in the proposal for: Section Number \_\_\_\_\_.
8. The successful bidder at the time of execution of the contract will be required to deposit a contract bond for the full amount of the award. When a contract bond is not required, the proposal guaranty check will be held in lieu thereof. If this proposal is accepted and the undersigned fails to execute a contract and contract bond as required, it is hereby agreed that the Bid Bond or check shall be forfeited to the Awarding Authority.
9. Each pay item should have a unit price and a total price. If no total price is shown or if there is a discrepancy between the product of the unit price multiplied by the quantity, the unit price shall govern. If a unit price is omitted, the total price will be divided by the quantity in order to establish a unit price.
10. A bid will be declared unacceptable if neither a unit price nor a total price is shown.
11. The undersigned submits herewith the schedule of prices on BLR 12200a covering the work to be performed under this contract.
12. The undersigned further agrees that if awarded the contract for the sections contained in the combinations on BLR 12200a, the work shall be in accordance with the requirements of each individual proposal for the multiple bid specified in the Schedule for Multiple Bids below.

RETURN WITH BID

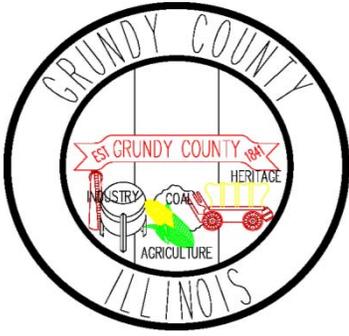

SCHEDULE OF PRICES

County Grundy  
 Local Public Agency Norman  
 Section 10-14111-00-BR  
 Route TR 93 Greer Road

Schedule for Multiple Bids

Combination Letter	Sections Included in Combinations	Total

Schedule for Single Bid

(For complete information covering these items, see plans and specifications)

Bidder's Proposal for making Entire Improvements

Item No.	Items	Unit	Quantity	Unit Price	Total
	Tree Removal (6 to 15 units Dia.)	Unit	8		
	Earth Excavation	Cu Yd	60		
	Channel Excavation	Cu Yd	495		
	Furnished Excavation	Cu Yd	39		
	Seeding, Class 2	Acre	0.08		
	Nitrogen Fertilizer Nutrient	Lbs.	7		
	Phosphorus Fertilizer Nutrient	Lbs.	7		
	Potassium Fertilizer Nutrient	Lbs.	7		
	Mulch, Method 2	Acre	0.08		
	Stone Riprap, Class A4	Sq Yd	343		
	Filter Fabric	Sq Yd	343		
	Aggregate Surface Course, Type B	Ton	118		
	Aggregate Shoulders, Type B	Ton	26		
	Removal of Existing Structures	Each	1		
	Structure Excavation	Cu Yd	93		
	Concrete Structures	Cu Yd	24.8		
	Concrete Encasement	Cu Yd	5		
	Precast/Prestressed 21" Conc Beams	Sq Ft	1311		
	Reinforcement Bars	Lbs.	2700		
	Steel Railing, Type S1	Foot	94		
	Furnishing Metal Shell Piles (12X0.25)	Foot	270		
Page 1 Total					



CONTRACTOR CERTIFICATIONS

County	<u>Grundy</u>
Local Public Agency	<u>Norman</u>
Section Number	<u>10-14111-00-BR</u>
Route	<u>TR 93 Greer Road</u>

The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder.

1. **Debt Delinquency.** The bidder or contractor or subcontractor, respectively, certifies that it is not delinquent in the payment of any tax administered by the Department of Revenue unless the individual or other entity is contesting, in accordance with the procedures established by the appropriate revenue Act, its liability for the tax or the amount of tax. Making a false statement voids the contract and allows the Department to recover all amounts paid to the individual or entity under the contract in a civil action.

2. **Bid-Rigging or Bid Rotating.** The bidder or contractor or subcontractor, respectively, certifies that it is not barred from contracting with the Department by reason of a violation of either 720 ILCS 5/33E-3 or 720 ILCS 5/33E-4.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

3. **Bribery.** The bidder or contractor or subcontractor, respectively, certifies that it has not been convicted of bribery or attempting to bribe an officer or employee of the State of Illinois or any unit of local government, nor has the firm made an admission of guilt of such conduct which is a matter of record, nor has an official, agent, or employee of the firm committed bribery or attempted bribery on behalf of the firm and pursuant to the direction or authorization of a responsible official of the firm.

4. **Interim Suspension or Suspension.** The bidder or contractor or subcontractor, respectively, certifies that it is not currently under a suspension as defined in Subpart I of Title 44 Subtitle A Chapter III Part 6 of the Illinois Administrative Code. Furthermore, if suspended prior to completion of this work, the contract or contracts executed for the completion of this work may be cancelled.

RETURN WITH BID

SIGNATURES

County Grundy
Local Public Agency Norman
Section Number 10-14111-00-BR
Route TR 93 Greer Road

(If an individual)

Signature of Bidder

Business Address

(If a partnership)

Firm Name

Signed By

Business Address

Inset Names and Addressed of All Partners



(If a corporation)

Corporate Name

Signed By

President

Business Address

Inset Names of Officers



President

Secretary

Treasurer

Attest: Secretary



**Local Agency  
Proposal Bid Bond**

Route TR 93 Greer Road  
County Grundy  
Local Agency Norman  
Section 10-14111-00-BR

**RETURN WITH BID**

**PAPER BID BOND**

WE \_\_\_\_\_ as PRINCIPAL,  
and \_\_\_\_\_ as SURETY,  
are held jointly, severally and firmly bound unto the above Local Agency (hereafter referred to as "LA") in the penal sum of 5% of the total bid price, or for the amount specified in the proposal documents in effect on the date of invitation for bids whichever is the lesser sum. We bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly pay to the LA this sum under the conditions of this instrument.

WHEREAS THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that, the said PRINCIPAL is submitting a written proposal to the LA acting through its awarding authority for the construction of the work designated as the above section.

THEREFORE if the proposal is accepted and a contract awarded to the PRINCIPAL by the LA for the above designated section and the PRINCIPAL shall within fifteen (15) days after award enter into a formal contract, furnish surety guaranteeing the faithful performance of the work, and furnish evidence of the required insurance coverage, all as provided in the "Standard Specifications for Road and Bridge Construction" and applicable Supplemental Specifications, then this obligation shall become void; otherwise it shall remain in full force and effect.

IN THE EVENT the LA determines the PRINCIPAL has failed to enter into a formal contract in compliance with any requirements set forth in the preceding paragraph, then the LA acting through its awarding authority shall immediately be entitled to recover the full penal sum set out above, together with all court costs, all attorney fees, and any other expense of recovery.

IN TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this \_\_\_\_\_ day of \_\_\_\_\_

**Principal**

\_\_\_\_\_  
(Company Name) \_\_\_\_\_  
By: \_\_\_\_\_ By: \_\_\_\_\_  
(Signature and Title) (Signature and Title)

(If PRINCIPLE is a joint venture of two or more contractors, the company names, and authorized signatures of each contractor must be affixed.)

**Surety**

\_\_\_\_\_  
(Name of Surety) By: \_\_\_\_\_  
(Signature of Attorney-in-Fact)

STATE OF ILLINOIS,  
COUNTY OF \_\_\_\_\_  
I, \_\_\_\_\_, a Notary Public in and for said county,  
do hereby certify that \_\_\_\_\_

( Insert names of individuals signing on behalf of PRINCIPAL & SURETY)

who are each personally known to me to be the same persons whose names are subscribed to the foregoing instrument on behalf of PRINCIPAL and SURETY, appeared before me this day in person and acknowledged respectively, that they signed and delivered said instruments as their free and voluntary act for the uses and purposes therein set forth.

Given under my hand and notarial seal this \_\_\_\_\_ day of \_\_\_\_\_

My commission expires \_\_\_\_\_  
(Notary Public)

**ELECTRONIC BID BOND**

**Electronic bid bond is allowed (box must be checked by LA if electronic bid bond is allowed)**

The Principal may submit an electronic bid bond, in lieu of completing the above section of the Proposal Bid Bond Form. By providing an electronic bid bond ID code and signing below, the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the LA under the conditions of the bid bond as shown above. (If PRINCIPAL is a joint venture of two or more contractors, an electronic bid bond ID code, company/Bidder name title and date must be affixed for each contractor in the venture.)

\_\_\_\_\_  
Electronic Bid Bond ID Code

\_\_\_\_\_  
(Company/Bidder Name)  
\_\_\_\_\_  
(Signature and Title) \_\_\_\_\_  
Date



# Apprenticeship or Training Program Certification

**Return with Bid**

Route	<u>TR 93 Greer Road</u>
County	<u>Grundy</u>
Local Agency	<u>Norman</u>
Section	<u>10-14111-00-BR</u>

**All contractors are required to complete the following certification:**

- For this contract proposal or for all groups in this deliver and install proposal.
- For the following deliver and install groups in this material proposal:

---



---



---

Illinois Department of Transportation policy, adopted in accordance with the provisions of the Illinois Highway Code, requires this contract to be awarded to the lowest responsive and responsible bidder. The award decision is subject to approval by the Department. In addition to all other responsibility factors, this contract or deliver and install proposal requires all bidders and all bidders' subcontractors to disclose participation in apprenticeship or training programs that are (1) approved by and registered with the United States Department of Labor's Bureau of Apprenticeship and Training, and (2) applicable to the work of the above indicated proposals or groups. Therefore, all bidders are required to complete the following certification:

- I. Except as provided in paragraph IV below, the undersigned bidder certifies that it is a participant, either as an individual or as part of a group program, in an approved apprenticeship or training program applicable to each type of work or craft that the bidder will perform with its own employees.
- II. The undersigned bidder further certifies for work to be performed by subcontract that each of its subcontractors submitted for approval either (A) is, at the time of such bid, participating in an approved, applicable apprenticeship or training program; or (B) will, prior to commencement of performance of work pursuant to this contract, establish participation in an approved apprenticeship or training program applicable to the work of the subcontract.
- III. The undersigned bidder, by inclusion in the list in the space below, certifies the official name of each program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's employees. Types of work or craft that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category for which there is no applicable apprenticeship or training program available.

---



---



---



---

IV. Except for any work identified above, any bidder or subcontractor that shall perform all or part of the work of the contract or deliver and install proposal solely by individual owners, partners or members and not by employees to whom the payment of prevailing rates of wages would be required, check the following box, and identify the owner/operator workforce and positions of ownership.

---

---

---

---

---

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project is accounted for and listed. The Department at any time before or after award may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. In order to fulfill the participation requirement, it shall not be necessary that any applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract or deliver and install proposal.

Bidder: \_\_\_\_\_

By: \_\_\_\_\_

(Signature)

Address: \_\_\_\_\_

Title: \_\_\_\_\_

RETURN WITH BID



**Affidavit of Illinois Business Office**

County Grundy  
Local Public Agency Norman  
Section Number 10-14111-00-BR  
Route TR 93 Greer Road

State of \_\_\_\_\_ )  
County of \_\_\_\_\_ ) ss.

I, \_\_\_\_\_ of \_\_\_\_\_, \_\_\_\_\_,  
(Name of Affiant) (City of Affiant) (State of Affiant)

being first duly sworn upon oath, states as follows:

1. That I am the \_\_\_\_\_ of \_\_\_\_\_  
officer or position bidder
2. That I have personal knowledge of the facts herein stated.
3. That, if selected under this proposal, \_\_\_\_\_, will maintain a  
(bidder)  
business office in the State of Illinois which will be located in \_\_\_\_\_ County, Illinois.
4. That this business office will serve as the primary place of employment for any persons employed in the construction contemplated by this proposal.
5. That this Affidavit is given as a requirement of state law as provided in Section 30-22(8) of the Illinois Procurement Code.

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Print Name of Affiant)

This instrument was acknowledged before me on \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_.

(SEAL)

\_\_\_\_\_  
(Signature of Notary Public)



# Illinois Department of Transportation

Bureau of Construction  
2300 South Dirksen Parkway/Room 322  
Springfield, Illinois 62764

## Affidavit of Availability For the Letting of \_\_\_\_\_

**Instructions:** Complete this form by either typing or using black ink. "Authorization to Bid" will not be issued unless both sides of this form are completed in detail. Use additional forms as needed to list all work.

### Part I. Work Under Contract

List below all work you have under contract as either a prime contractor or a subcontractor. It is required to include all pending low bids not yet awarded or rejected. In a joint venture, list only that portion of the work which is the responsibility of your company. The uncompleted dollar value is to be based upon the most recent engineer's or owners estimate, and must include work subcontracted to others. If no work is contracted, show **NONE**.

	1	2	3	4	Awards Pending	
Contract Number						
Contract With						
Estimated Completion Date						
Total Contract Price						Accumulated Totals
Uncompleted Dollar Value if Firm is the Prime Contractor						
Uncompleted Dollar Value if Firm is the Subcontractor						
<b>Total Value of All Work</b>						

### Part II. Awards Pending and Uncompleted Work to be done with your own forces.

List below the uncompleted dollar value of work for each contract and awards pending to be completed with your own forces. All work subcontracted to others will be listed on the reverse of this form. In a joint venture, list only that portion of the work to be done by your company. If no work is contracted, show **NONE**.

						Accumulated Totals
Earthwork						
Portland Cement Concrete Paving						
HMA Plant Mix						
HMA Paving						
Clean & Seal Cracks/Joints						
Aggregate Bases & Surfaces						
Highway, R.R. and Waterway Structures						
Drainage						
Electrical						
Cover and Seal Coats						
Concrete Construction						
Landscaping						
Fencing						
Guardrail						
Painting						
Signing						
Cold Milling, Planning & Rotomilling						
Demolition						
Pavement Markings (Paint)						
Other Construction (List)						
						\$ 0.00
<b>Totals</b>						

Disclosure of this information is **REQUIRED** to accomplish the statutory purpose as outlined in the "Illinois Procurement Code." Failure to comply will result in non-issuance of an "Authorization To Bid." This form has been approved by the State Forms Management Center.

**Part III. Work Subcontracted to Others.**

For each contract described in Part I, list all the work you have subcontracted to others.

	1	2	3	4	Awards Pending
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Total Uncompleted					

I, being duly sworn, do hereby declare that this affidavit is a true and correct statement relating to ALL uncompleted contracts of the undersigned for Federal, State, County, City and private work, including ALL subcontract work, ALL pending low bids not yet awarded or rejected and ALL estimated completion dates.

Subscribed and sworn to before me  
 this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_ Type or Print Name \_\_\_\_\_  
 Officer or Director Title

Signed \_\_\_\_\_

\_\_\_\_\_  
 Notary Public

My commission expires \_\_\_\_\_

(Notary Seal)

Company \_\_\_\_\_

Address \_\_\_\_\_



## **SPECIAL PROVISIONS**

The following Special Provisions supplement the "Standard Specifications for Road and Bridge Construction", Adopted **April 1, 2016**, the latest edition of the "Manual on Uniform Traffic Control Devices for Streets and Highways", and the "Manual of Test Procedures of Materials" in effect on the date of invitation of bids, and the Supplemental Specifications and Recurring Special Provisions indicated on the Check Sheet included here in which apply to and govern the construction of **Greer Road Bridge, section #: 10-14111-00-BR**, and in case of conflict with any part, or parts, of said Specifications, the said Special Provisions shall take precedence and shall govern.

### **Description of Work:**

This work shall consist of the removal of the existing arch culvert and construction of a single span precast prestressed concrete deck beam structure on concrete spill thru pile bent abutments, 48'-3 3/8" back to back of abutments and 28'-0" out to out of deck with a 23° 30' ahead left skew. Also included are channel excavation and protection, erosion control measures, seeding, and other related work. This project is located on Greer Road ½ mile west of Verona Road approximately 7 miles southwest of Morris, Illinois.

### **Standards in the Plans:**

The Standards with the revision number listed in the list of required Standards, included in the Plans, shall hold precedence over the Standard number listed in the Special Provisions or elsewhere in the plans of this contract.

### **J.U.L.I.E. System:**

The toll free number for the Joint Utility Location Information for Excavators is 800-892-0123 or 811.

### **Traffic Control and Protection (Special):**

Traffic control shall be in accordance with the applicable sections of the Standard Specifications for Road and Bridge Construction, the applicable guidelines contained in the Manual on Uniform Traffic Control Devices for Streets and Highways, these Special Provisions, and any details and Highway Standards contained herein and in the plans.

Special attention is called to Article 107.09 and Section 701 of the Standard Specifications for Road and Bridge Construction and the following Highway Standards.

Standards 701901  
BLR Std. 21

All advance warning signs shall be new or in like new condition at the start of the project. The contractor shall be responsible for the condition and placement of traffic control devices at all times during construction activities and throughout shutdown periods.

Sign posts shall be 4x4 inch wood posts according to Article 1007.05. The use of metal posts will not be permitted.

Type III Barricades and advance warning signs shall be erected at each end of the section under construction to safeguard the public, while warning signs shall be erected notifying traffic of construction of the project. The Contractor shall furnish all barricades and signs required. Each Type III Barricade at the road closure shall be equipped with two Type A warning lights.

The Contractor will be required to close Township Road 103 (O'Malley Road) to all traffic during the construction of this project. Barricades and warning signs shall be erected at each end of the section under construction to safeguard the public, while R11-3 signs shall be erected, notifying traffic that the road is closed. Access to all adjacent properties shall be maintained during construction of this project. Traffic control and protection shall be in accordance with the standards included in the plans and shall be paid for at the contract lump sum price for TRAFFIC CONTROL AND PROTECTION (SPECIAL), which price shall be payment in full for all materials, labor, and equipment required for this item as specified and to the satisfaction of the Engineer.

Local emergency services shall be notified of construction of this project prior to closure of the road and beginning of construction.

**Removal of Existing Structures:**

This work shall consist of the Contractor removing and disposing of the existing structure. The existing structure consists of a tank car culvert. Removal of the structure shall be done in accordance with the applicable portions of Section 501 of the Standard Specifications for Road and Bridge Construction. **The existing culvert pipe shall be salvaged and will remain the property of Norman Township. The contractor shall contact the Norman Township Road Commissioner, Mr. Brad Baker (cell (815) 228-3860), at least 2 business days prior to the removal of the culvert pipe so he can**

**arrange pickup.** Contractor shall provide equipment and labor to load the pipe onto a flatbed truck for the Road Commissioner.

This item will be paid for at the contract unit price per each for REMOVAL OF EXISTING STRUCTURES, which price shall be payment in full for all materials, labor, and equipment necessary to complete this item as specified and to the satisfaction of the Engineer.

**Responsibility of the Contractor:**

It shall be the Contractor's responsibility to abide by any and all conditions contained in the permit from the Army Corps of Engineers, a copy of which is included in the proposal.

The Contractor, otherwise, shall obtain his own Individual Permit from the Corps prior to beginning any work on or adjacent to the waterway.

The Contractor shall be responsible for denying public use/access of any temporary crossings he/she may construct.

**Shop Drawings:**

Shop Drawings shall be submitted for checking and approval to Chamlin & Associates, Inc., 3017 Fifth Street, Peru, Illinois 61354, ATTN: Mr. Jim Clinard.

**Seeding, Class 2 (Special):**

This work shall be done in accordance with Sections 250 and 251 of the Standard Specifications for Road and Bridge Construction and the following provisions:

Add the following to Article 250.03.

- (i) Tiller Rake.....1101.08(i)

Add the following to Article 1101.08(i).

- (i) Tiller Rake: The tiller rake attachment shall consist of a spring shank cultivator to which rear crossbars are attached. This attachment shall be designed to break up clods and lumps, deposit them in hollows and depressions, and then permit the rear fine tooth crossbars to gradually distribute the finer soil into a smooth distribution of material. The tiller rake attachment shall have a cutting swath of no less than 7 feet, and the cultivator attached shall not have less than 12 tines equipped with 10 cultivating shovels. An adjustable hand and pitch control wheel shall be provided for the tiller rake depth adjustment.

This unit shall be designed for mounting on the three-point hydraulically operated tractor drawbar.

Revise the third paragraph of Article 250.04 to read as follows:

“The fertilizer nutrients shall be applied at a rate of 270 pounds of actual nutrients per acre.”

Revise the first sentence of the first paragraph of Article 1081.08 to read as follows:

“The fertilizer furnished shall be a ready mix material having a ratio of 1-1-1.”

Revise the sixth sentence of the first paragraph of Article 250.06 to read as follows:

“When seed or fertilizer is applied with a hydraulic seeder, the rate of application shall be not less than 500 gallons of slurry per acre.”

Seeded areas shall be mulched in accordance with Article 251.03. The Contractor shall use Procedure 1 of Method 2. Mulch shall be applied at a rate of 2 tons per acre.

Revise Articles 250.10 and 251.07 so that the following applies:

Basis of Payment: This work shall be paid for at the contract unit price per acre for SEEDING, CLASS 2. The items of Mulch and Fertilizer Nutrients shall be paid for separately in the unit price per pound for MULCH METHOD 2, NITROGEN FERTILIZER NUTRIENT, PHOSPHORUS, and POTASSIUM FERTILIZER NUTRIENT.

**Embankment:**

This work shall be performed in accordance with Section 205 of the Standard Specifications except that the embankment material shall not be placed and compacted at moisture contents in excess of 110 percent of optimum moisture unless authorized, in writing, by the Engineer.

Topsoil material shall not be placed in the embankment within 12” of high type base and surface courses.

Embankment material that will lie under the proposed roadway that is brought from an offsite location by the contractor shall be approved by the engineer prior to installation.

**Abutment Backfill:**

The structure excavation area behind the abutments along the width of the cap shall be backfilled with Porous Granular Embankment in accordance with Section 207 of the Standard Specifications for Road and Bridge Construction. This material shall be placed to within 11¾” of the finished grade elevation and shall be placed and compacted in accordance with the applicable portions of the Standard Specifications for Road and Bridge Construction and to the satisfaction of the Engineer. The material shall be placed

in lifts of a maximum of 6" and shall be compacted to the satisfaction of the Engineer utilizing a plate compactor.

Placement of the material will be paid for and the contract unit price per cubic yard for POROUS GRANULAR EMBANKMENT, which price shall be payment in full for furnishing all material, labor, and equipment required for this item as specified and to the satisfaction of the Engineer.

**Existing Field Tiles:**

Any existing drainage fixture providing drainage from field tile systems or otherwise to the stream, unless otherwise noted in the project plans, are to remain in place. Should any device be damaged by any of the Contractor's activities, it shall be repaired or replaced by the Contractor in accordance with the applicable portions of the Standard Specifications for Road and Bridge Construction and to the satisfaction of the Engineer. When deemed by the Engineer that the damage was avoidable, no additional compensation will be made to the Contractor for material, labor, or equipment needed for repair or replacement of these items.

**Status of Utilities to be Adjusted:**

<u>Name and Address</u>	<u>Type</u>	<u>Location</u>	<u>Estimated Date Relocation Completed</u>
Commonwealth Edison 1910 South Briggs Street Joliet, IL 60433	Electric	Throughout Project	No Conflict
ATT 65 West Webster Street, Floor 4E Joliet, IL 60431	Telephone	Throughout Project	No Conflict

The above represents the best information of the department and is only included for the convenience of the bidder. The applicable provisions of Article 105.07 and 107.20 of the Standard Specifications for Road and Bridge Construction shall apply. The contractor shall have all utilities marked prior to beginning work. Contractor shall notify engineer immediately should possible conflicts be found.

If any utility adjustment or removal has not been completed when required by the Contractor's operations, the Contractor should notify the Engineer in writing. A request for an extension of time will be considered to the extent the Contractor's operations were affected.

CHECK SHEET  
FOR  
RECURRING SPECIAL PROVISIONS

Adopted April 1, 2016

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

<u>CHECK SHEET #</u>	<u>RECURRING SPECIAL PROVISIONS</u>	<u>PAGE NO.</u>
1	<input type="checkbox"/> Additional State Requirements for Federal-Aid Construction Contracts	1
2	<input type="checkbox"/> Subletting of Contracts (Federal-Aid Contracts)	4
3	<input type="checkbox"/> EEO	5
4	<input type="checkbox"/> Specific EEO Responsibilities Non Federal-Aid Contracts	15
5	<input type="checkbox"/> Required Provisions - State Contracts	20
6	<input type="checkbox"/> Asbestos Bearing Pad Removal	26
7	<input type="checkbox"/> Asbestos Waterproofing Membrane and Asbestos Hot-Mix Asphalt Surface Removal	27
8	<input type="checkbox"/> Temporary Stream Crossings and In-Stream Work Pads	28
9	<input type="checkbox"/> Construction Layout Stakes Except for Bridges	29
10	<input type="checkbox"/> Construction Layout Stakes	32
11	<input type="checkbox"/> Use of Geotextile Fabric for Railroad Crossing	35
12	<input type="checkbox"/> Subsealing of Concrete Pavements	37
13	<input type="checkbox"/> Hot-Mix Asphalt Surface Correction	41
14	<input type="checkbox"/> Pavement and Shoulder Resurfacing	43
15	<input type="checkbox"/> Patching with Hot-Mix Asphalt Overlay Removal	44
16	<input type="checkbox"/> Polymer Concrete	45
17	<input type="checkbox"/> PVC Pipeliner	47
18	<input type="checkbox"/> Bicycle Racks	48
19	<input type="checkbox"/> Temporary Portable Bridge Traffic Signals	50
20	<input type="checkbox"/> Work Zone Public Information Signs	52
21	<input type="checkbox"/> Nighttime Inspection of Roadway Lighting	53
22	<input type="checkbox"/> English Substitution of Metric Bolts	54
23	<input type="checkbox"/> Calcium Chloride Accelerator for Portland Cement Concrete	55
24	<input type="checkbox"/> Quality Control of Concrete Mixtures at the Plant	56
25	<input type="checkbox"/> Quality Control/Quality Assurance of Concrete Mixtures	64
26	<input type="checkbox"/> Digital Terrain Modeling for Earthwork Calculations	80
27	<input type="checkbox"/> Pavement Marking Removal	82
28	<input type="checkbox"/> Preventive Maintenance – Bituminous Surface Treatment	83
29	<input type="checkbox"/> Preventive Maintenance – Cape Seal	89
30	<input type="checkbox"/> Preventive Maintenance – Micro-Surfacing	104
31	<input type="checkbox"/> Preventive Maintenance – Slurry Seal	115
32	<input type="checkbox"/> Temporary Raised Pavement Markers	125
33	<input type="checkbox"/> Restoring Bridge Approach Pavements Using High-Density Foam	126

CHECK SHEET  
FOR  
LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS

Adopted April 1, 2016

The following LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS

<u>CHECK SHEET #</u>	<u>PAGE NO.</u>
LRS 1	130
LRS 2	131
LRS 3	132
LRS 4	133
LRS 5	134
LRS 6	135
LRS 7	141
LRS 8	147
LRS 9	148
LRS 10	149
LRS 11	150
LRS 12	152
LRS 13	154
LRS 14	155
LRS 15	158
LRS 16	159
LRS 17	160
LRS 18	161

INDEX  
FOR  
SUPPLEMENTAL SPECIFICATIONS  
AND RECURRING SPECIAL PROVISIONS

Adopted April 1, 2016

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS, frequently used RECURRING SPECIAL PROVISIONS, and LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS.

No ERRATA this year.

SUPPLEMENTAL SPECIFICATIONS

Std. Spec. Sec.

Page No.

No Supplemental Specifications this year.

BDE SPECIAL PROVISIONS  
For the July 29 and September 16, 2016 Lettings

The following special provisions indicated by an "x" are applicable to this contract and will be included by the Project Development and Implementation Section of the BD&E. An \* indicates a new or revised special provision for the letting.

<u>File Name</u>	<u>#</u>	<u>Special Provision Title</u>	<u>Effective</u>	<u>Revised</u>
80099	1	Accessible Pedestrian Signals (APS)	April 1, 2003	Jan. 1, 2014
80274	2	Aggregate Subgrade Improvement	April 1, 2012	April 1, 2016
80192	3	Automated Flagger Assistance Device	Jan. 1, 2008	
80173	4	Bituminous Materials Cost Adjustments	Nov. 2, 2006	July 1, 2015
80241	5	Bridge Demolition Debris	July 1, 2009	
5026I	6	Building Removal-Case I (Non-Friable and Friable Asbestos)	Sept. 1, 1990	April 1, 2010
5048I	7	Building Removal-Case II (Non-Friable Asbestos)	Sept. 1, 1990	April 1, 2010
5049I	8	Building Removal-Case III (Friable Asbestos)	Sept. 1, 1990	April 1, 2010
5053I	9	Building Removal-Case IV (No Asbestos)	Sept. 1, 1990	April 1, 2010
* 80366	10	Butt Joints	July 1, 2016	
80360	11	Coarse Aggregate Quality	July 1, 2015	
80198	12	Completion Date (via calendar days)	April 1, 2008	
80199	13	Completion Date (via calendar days) Plus Working Days	April 1, 2008	
* 80293	14	Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ 5 Feet	April 1, 2012	July 1, 2016
80311	15	Concrete End Sections for Pipe Culverts	Jan. 1, 2013	April 1, 2016
80277	16	Concrete Mix Design – Department Provided	Jan. 1, 2012	April 1, 2016
80261	17	Construction Air Quality – Diesel Retrofit	June 1, 2010	Nov. 1, 2014
80029	18	Disadvantaged Business Enterprise Participation	Sept. 1, 2000	Jan. 2, 2016
80363	19	Engineer's Field Office	April 1, 2016	
80358	20	Equal Employment Opportunity	April 1, 2015	
80364	21	Errata for the 2016 Standard Specifications	April 1, 2016	
80229	22	Fuel Cost Adjustment	April 1, 2009	July 1, 2015
80304	23	Grooving for Recessed Pavement Markings	Nov. 1, 2012	Aug. 1, 2014
80246	24	Hot-Mix Asphalt – Density Testing of Longitudinal Joints	Jan. 1, 2010	April 1, 2016
80347	25	Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite Sampling	Nov. 1, 2014	April 1, 2016
* 80367	26	Light Poles	July 1, 2016	
* 80368	27	Light Tower	July 1, 2016	
80336	28	Longitudinal Joint and Crack Patching	April 1, 2014	April 1, 2016
* 80369	29	Mast Arm Assembly and Pole	July 1, 2016	
80045	30	Material Transfer Device	June 15, 1999	Aug. 1, 2014
80342	31	Mechanical Side Tie Bar Inserter	Aug. 1, 2014	April 1, 2016
* 80370	32	Mechanical Splicers	July 1, 2016	
80165	33	Moisture Cured Urethane Paint System	Nov. 1, 2006	Jan. 1, 2010
80361	34	Overhead Sign Structures Certification of Metal Fabricator	Nov. 1, 2015	April 1, 2016
80349	35	Pavement Marking Blackout Tape	Nov. 1, 2014	April 1, 2016
* 80371	36	Pavement Marking Removal	July 1, 2016	
80298	37	Pavement Marking Tape Type IV	April 1, 2012	April 1, 2016
80365	38	Pedestrian Push-Button	April 1, 2016	
* 80372	39	Preventive Maintenance – Bituminous Surface Treatment (A-1)	Jan. 1, 2009	July 1, 2016
* 80373	40	Preventive Maintenance – Cape Seal	Jan. 1, 2009	July 1, 2016
* 80374	41	Preventive Maintenance – Micro-Surfacing	Jan. 1, 2009	July 1, 2016
* 80375	42	Preventive Maintenance – Slurry Seal	Jan. 1, 2009	July 1, 2016
* 80359	43	Portland Cement Concrete Bridge Deck Curing	April 1, 2015	July 1, 2016
80353	44	Portland Cement Concrete Inlay or Overlay	Jan. 1, 2015	April 1, 2016

<u>File Name</u>	<u>#</u>	<u>Special Provision Title</u>	<u>Effective</u>	<u>Revised</u>
80338	45	Portland Cement Concrete Partial Depth Hot-Mix Asphalt Patching	April 1, 2014	April 1, 2016
80300	46	Preformed Plastic Pavement Marking Type D - Inlaid	April 1, 2012	April 1, 2016
80328	47	Progress Payments	Nov. 2, 2013	
3426I	48	Railroad Protective Liability Insurance	Dec. 1, 1986	Jan. 1, 2006
80157	49	Railroad Protective Liability Insurance (5 and 10)	Jan. 1, 2006	
80306	50	Reclaimed Asphalt Pavement (RAP) and Reclaimed Asphalt Shingles (RAS)	Nov. 1, 2012	April 1, 2016
80340	51	Speed Display Trailer	April 2, 2014	April 1, 2016
80127	52	Steel Cost Adjustment	April 2, 2004	July 1, 2015
80362	53	Steel Slag in Trench Backfill	Jan. 1, 2016	
80317	54	Surface Testing of Hot-Mix Asphalt Overlays	Jan. 1, 2013	April 1, 2016
80355	55	Temporary Concrete Barrier	Jan. 1, 2015	July 1, 2015
20338	56	Training Special Provisions	Oct. 15, 1975	
80318	57	Traversable Pipe Grate	Jan. 1, 2013	April 1, 2014
80288	58	Warm Mix Asphalt	Jan. 1, 2012	April 1, 2016
80302	59	Weekly DBE Trucking Reports	June 2, 2012	April 2, 2015
80289	60	Wet Reflective Thermoplastic Pavement Marking	Jan. 1, 2012	
80071	61	Working Days	Jan. 1, 2002	

The following special provisions and recurring special provisions are in the 2016 Standard Specifications.

<u>File Name</u>	<u>Special Provision Title</u>	<u>New Location</u>	<u>Effective</u>	<u>Revised</u>
80240	Above Grade Inlet Protection	Articles 280.02, 280.04, and 1081.15	July 1, 2009	Jan. 1, 2012
80310	Coated Galvanized Steel Conduit	Article 811.03	Jan. 1, 2013	Jan. 1, 2015
80341	Coilable Nonmetallic Conduit	Article 1088.01	Aug. 1, 2014	Jan. 1, 2015
80294	Concrete Box Culverts with Skews $\leq$ 30 Degrees Regardless of Design Fill and Skews $>$ 30 Degrees with Design Fills $>$ 5 Feet	Article 540.04	April 1, 2012	April 1, 2014
80334	Concrete Gutter, Curb, Median, and Paved Ditch	Articles 606.02, 606.07, and 1050.04	April 1, 2014	Aug. 1, 2014
80335	Contract Claims	Article 109.09	April 1, 2014	
Chk Sht #27	English Substitution of Metric Reinforcement Bars	Article 508.09	April 1, 1996	Jan. 1, 2011
80265	Friction Aggregate	Articles 1004.01 and 1004.03	Jan. 1, 2011	Nov. 1, 2014
80329	Glare Screen	Sections 638 and 1085	Jan. 1, 2014	
Chk Sht #20	Guardrail and Barrier Wall Delineation	Sections 635, 725, 782, and 1097	Dec. 15, 1993	Jan. 1, 2012
80322	Hot-Mix Asphalt – Mixture Design Composition and Volumetric Requirements	Sections 312, 355, 406, 407, 442, 482, 601, 1003, 1004, 1030, and 1102	Nov. 1, 2013	Nov. 1, 2014
80323	Hot-Mix Asphalt – Mixture Design Verification and Production	Sections 406, 1030, and 1102	Nov. 1, 2013	Nov. 1, 2014
80348	Hot-Mix Asphalt – Prime Coat	Sections 403, 406, 407, 408, 1032, and 1102	Nov. 1, 2014	
80315	Insertion Lining of Culverts	Sections 543 and 1029	Jan. 1, 2013	Nov. 1, 2013
80351	Light Tower	Article 1069.08	Jan. 1, 2015	
80324	LRFD Pipe Culvert Burial Tables	Sections 542 and 1040	Nov. 1, 2013	April 1, 2015
80325	LRFD Storm Sewer Burial Tables	Sections 550 and 1040	Nov. 1, 2013	April 1, 2015
80337	Paved Shoulder Removal	Article 440.07	April 1, 2014	
80254	Pavement Patching	Article 701.17	Jan. 1, 2010	
80352	Pavement Striping - Symbols	Article 780.14	Jan. 1, 2015	

<u>File Name</u>	<u>Special Provision Title</u>	<u>New Location</u>	<u>Effective</u>	<u>Revised</u>
Chk Sht #19	Pipe Underdrains	Section 601 and Articles 1003.01, 1003.04, 1004.05, 1040.06, and 1080.05	Sept. 9, 1987	Jan. 1, 2007
80343	Precast Concrete Handhole	Articles 814.02, 814.03, and 1042.17	Aug. 1, 2014	
80350	Retroreflective Sheeting for Highway Signs	Article 1091.03	Nov. 1, 2014	
80327	Reinforcement Bars	Section 508 and Articles 421.04, 442.06, 1006.10	Nov. 1, 2013	
80344	Rigid Metal Conduit	Article 1088.01	Aug. 1, 2014	
80354	Sidewalk, Corner, or Crosswalk Closure	Article 1106.02	Jan. 1, 2015	April 1, 2015
80301	Tracking the Use of Pesticides	Article 107.23	Aug. 1, 2012	
80356	Traffic Barrier Terminals Type 6 or 6B	Article 631.02	Jan. 1, 2015	
80345	Underpass Luminaire	Articles 821.06 and 1067.04	Aug. 1, 2014	April 1, 2015
80357	Urban Half Road Closure with Mountable Median	Articles 701.18, 701.19, and 701.20	Jan. 1, 2015	July 1, 2015
80346	Waterway Obstruction Warning Luminaire	Article 1067.07	Aug. 1, 2014	April 1, 2015

The following special provisions require additional information from the designer. The additional information needs to be included in a separate document attached to this check sheet. The Project Development and Implementation section will then include the information in the applicable special provision. The Special Provisions are:

- Bridge Demolition Debris
- Building Removal-Case I
- Building Removal-Case II
- Building Removal-Case III
- Building Removal-Case IV
- Completion Date
- Completion Date Plus Working Days
- DBE Participation
- Material Transfer Device
- Railroad Protective Liability Insurance
- Training Special Provisions
- Working Days

## GUIDE BRIDGE SPECIAL PROVISION INDEX/CHECK SHEET

Effective as of the: July 29, 2016 Letting

√	<u>File Name</u>	<u>Title</u>	<u>Effective</u>	<u>Revised</u>
	GBSP4	Polymer Modified Portland Cement Mortar	Jun 7, 1994	Apr 1, 2016
	GBSP12	Drainage System	Jun 10, 1994	Jun 24, 2015
	GBSP13	High-Load Multi-Rotational Bearings	Oct 13, 1988	Apr 1, 2016
	GBSP14	Jack and Remove Existing Bearings	Apr 20, 1994	Jan 1, 2007
	GBSP15	Three Sided Precast Concrete Structure	Jul 12, 1994	Dec 29, 2014
	GBSP16	Jacking Existing Superstructure	Jan 11, 1993	Jan 1, 2007
	GBSP17	Bonded Preformed Joint Seal	Jul 12, 1994	Jan 1, 2007
	GBSP18	Modular Expansion Joint	May 19, 1994	Dec 29, 2014
	GBSP21	Cleaning and Painting Contact Surface Areas of Existing Steel Structures	Jun 30, 2003	May 18, 2011
	GBSP25	Cleaning and Painting Existing Steel Structures	Oct 2, 2001	Apr 22, 2016
	GBSP26	Containment and Disposal of Lead Paint Cleaning Residues	Oct 2, 2001	Apr 22, 2016
	GBSP28	Deck Slab Repair	May 15, 1995	Oct 15, 2011
	GBSP29	Bridge Deck Microsilica Concrete Overlay	May 15, 1995	Apr 1, 2016
	GBSP30	Bridge Deck Latex Concrete Overlay	May 15, 1995	Jun 24, 2015
	GBSP31	Bridge Deck High-Reactivity Metakaolin (HRM) Conc Overlay	Jan 21, 2000	Apr 1, 2016
	GBSP33	Pedestrian Truss Superstructure	Jan 13, 1998	Dec 29, 2014
	GBSP34	Concrete Wearing Surface	Jun 23, 1994	Apr 1, 2016
	GBSP35	Silicone Bridge Joint Sealer	Aug 1, 1995	Oct 15, 2011
	GBSP45	Bridge Deck Thin Polymer Overlay	May 7, 1997	Feb 6, 2013
	GBSP51	Pipe Underdrain for Structures	May 17, 2000	Jan 22, 2010
	GBSP53	Structural Repair of Concrete	Mar 15, 2006	Apr 1, 2016
	GBSP55	Erection of Curved Steel Structures	Jun 1, 2007	
	GBSP56	Setting Piles in Rock	Nov 14, 1996	Apr 1, 2016
	GBSP59	Diamond Grinding and Surface Testing Bridge Sections	Dec 6, 2004	Jan 3, 2014
	GBSP60	Containment and Disposal of Non-Lead Paint Cleaning Residues	Nov 25, 2004	Apr 22, 2016
	GBSP61	Slipform Parapet	Jun 1, 2007	Apr 22, 2016
	GBSP67	Structural Assessment Reports for Contractor's Means and Methods	Mar 6, 2009	Oct 5, 2015
	GBSP71	Aggregate Column Ground Improvement	Jan 15, 2009	Oct 15, 2011
	GBSP72	Bridge Deck Fly Ash or GGBF Slag Concrete Overlay	Jan 18, 2011	Jun 24, 2015
	GBSP73	Cofferdams	Oct 15, 2011	
	GBSP75	Bond Breaker for Prestressed Concrete Bulb-T Beams	Apr 19, 2012	
	GBSP76	Granular Backfill for Structures	Apr 19, 2012	Oct 30, 2012
	GBSP77	Weep Hole Drains for Abutments, Wingwalls, Retaining Walls and Culverts	Apr 19, 2012	Oct 22, 2013
	GBSP78	Bridge Deck Construction	Oct 22, 2013	Apr 1, 2016
	GBSP79	Bridge Deck Grooving (Longitudinal)	Dec 29, 2014	Apr 1, 2016
	GBSP84	Precast, Prestressed Concrete Beams	Oct 5, 2015	
	GBSP85	Micropiles	Apr 19, 1996	Oct 5, 2015
	GBSP86	Drilled Shafts	Oct 5, 2015	April 1, 2016
	GBSP87	Lightweight Cellular Concrete Fill	Nov 11, 2001	Apr 1, 2016
	GBSP88	Corrugated Structural Plate Structures	Apr 22, 2016	

LIST ADDITIONAL SPECIAL PROVISIONS BELOW

--	--

The following Guide Bridge Special Provisions have been incorporated into the 2016 Standard Specifications:

File Name	Title	Std Spec Location
GBSP32	Temporary Sheet Piling	522
GBSP38	Mechanically Stabilized Earth Retaining Walls	522
GBSP42	Drilled Soldier Pile Retaining Wall	522
GBSP43	Driven Soldier Pile Retaining Wall	522
GBSP44	Temporary Soil Retention System	522
GBSP46	Geotextile Retaining Walls	522
GBSP57	Temporary Mechanically Stabilized Earth Retaining Walls	522
GBSP62	Concrete Deck Beams	504
GBSP64	Segmental Concrete Block Wall	522
GBSP65	Precast Modular Retaining Wall	522
GBSP74	Permanent Steel Sheet Piling (LRFD)	522
GBSP80	Fabric Reinforced Elastomeric	1028

The following Guide Bridge Special Provisions have been discontinued or have been superseded:

File Name	Title	Disposition:
GBSP70	Braced Excavation	Use TSRS per Sec 522

State of Illinois  
Department of Transportation  
Bureau of Local Roads and Streets

SPECIAL PROVISION  
FOR  
INSURANCE

Effective: February 1, 2007  
Revised: August 1, 2007

All references to Sections or Articles in this specification shall be construed to mean specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

The Contractor shall name the following entities as additional insured under the Contractor's general liability insurance policy in accordance with Article 107.27:

---

---

---

---

---

---

---

---

The entities listed above and their officers, employees, and agents shall be indemnified and held harmless in accordance with Article 107.26.

State of Illinois  
Department of Transportation  
Bureau of Local Roads and Streets  
SPECIAL PROVISION  
FOR  
CONSTRUCTION AND MAINTENANCE SIGNS

Effective: January 1, 2004  
Revised: June 1, 2007

All references to Sections or Articles in this specification shall be construed to mean a specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

701.14. Signs. Add the following paragraph to Article 701.14:

All warning signs shall have minimum dimensions of 1200 mm x 1200 mm (48" x 48") and have a black legend on a fluorescent orange reflectorized background, meeting, as a minimum, Type AP reflectivity requirements of Table 1091-2 in Article 1091.02.

## ERRATA FOR THE 2016 STANDARD SPECIFICATIONS (BDE)

Effective: April 1, 2016

- Page 84 Article 204.02. In the seventh line of the first paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)".
- Page 90 Article 205.06. In the first sentence of the third paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)".
- Page 91 Article 205.06. In the first sentence of the fourth paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)", and in the second sentence change "AASHTO T 224" to "Illinois Modified AASHTO T 99 (Annex A1)".
- Page 91 Article 205.06. In the second line of the fifth paragraph change "AASHTO T 191" to "Illinois Modified AASHTO T 191".
- Page 91 Article 205.06. In the sixth line of the eighth paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)".
- Page 148 Article 302.09. In the second sentence of the fifth paragraph change "AASHTO T 191" to "Illinois Modified AASHTO T 191", and in the third sentence change "AASHTO T 99" to "Illinois Modified AASHTO T 99".
- Page 152 Article 310.09. In the second sentence of the second paragraph change "AASHTO T 191" to "Illinois Modified AASHTO T 191", and in the third sentence change "AASHTO T 99" to "Illinois Modified AASHTO T 99".
- Page 155 Article 311.05(a). In the first sentence of the fifth paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)", and in the second sentence change "AASHTO T 224" to "Illinois Modified AASHTO T 99 (Annex A1)".
- Page 155 Article 311.05(a). In the second line of the sixth paragraph change "AASHTO T 191" to "Illinois Modified AASHTO T 191".
- Page 163 Article 351.05(a). In the second sentence of the fifth paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)", and in the third sentence change "AASHTO T 224" to "Illinois Modified AASHTO T 99 (Annex A1)".
- Page 163 Article 351.05(a). In the second line of the sixth paragraph change "AASHTO T 191" to "Illinois Modified AASHTO T 191".
- Page 169 Article 352.11. In the second sentence of the fourth paragraph change "AASHTO T 191" to "Illinois Modified AASHTO T 191", and in the third sentence change "AASHTO T 134 (Method B)" to "Illinois Modified AASHTO T 134 (Method B)".

Page 169 Article 352.12. In the first sentence of the first paragraph change "AASHTO T 22" to "Illinois Modified AASHTO T 22", and in the second sentence change "AASHTO T 134 (Method B)" to "Illinois Modified AASHTO T 134 (Method B)".

Page 196 Article 406.07(a). After the footnotes in Table 1 - Minimum Roller Requirements for HMA add the following:

"EQUIPMENT DEFINITION

- V<sub>s</sub> - Vibratory roller, static mode, minimum 125 lb/in. (2.2 kg/mm) of roller width. Maximum speed = 3 mph (5 km/h) or 264 ft/min (80 m/min). If the vibratory roller does not eliminate roller marks, its use shall be discontinued and a tandem roller, adequately ballasted to remove roller marks, shall be used.
- V<sub>D</sub> - Vibratory roller, dynamic mode, operated at a speed to produce not less than 10 impacts/ft (30 impacts/m).
- P - Pneumatic-tired roller, max. speed 3 1/2 mph (5.5 km/h) or 308 ft/min (92 m/min). The pneumatic-tired roller shall have a minimum tire pressure of 80 psi (550 kPa) and shall be equipped with heat retention shields. The self-propelled pneumatic-tired roller shall develop a compression of not less than 300 lb (53 N) nor more than 500 lb (88 N) per in. (mm) of width of the tire tread in contact with the HMA surface.
- T<sub>B</sub> - Tandem roller for breakdown rolling, 8 to 12 tons (7 to 11 metric tons), 250 to 400 lb/in. (44 to 70 N/mm) of roller width, max. speed = 3 1/2 mph (5.5 km/h) or 308 ft/min (92 m/min).
- T<sub>F</sub> - Tandem roller for final rolling, 200 to 400 lb/in. (35 to 70 N/mm) of roller width with minimum roller width of 50 in. (1.25 m). Ballast shall be increased if roller marks are not eliminated. Ballast shall be decreased if the mat shoves or distorts.
- 3W- Three wheel roller, max. speed = 3 mph (5 km/h) or 264 ft/min (80 m/min), 300 to 400 lb/in. (53 to 70 N/mm) of roller width. The three-wheel roller shall weigh 10 to 12 tons (9 to 11 metric tons)."

Page 331 Article 505.04(p). Under Range of Clearance in the first table change "in. x 10<sup>-6</sup>" to "in. x 10<sup>-3</sup>".

Page 444 Article 542.03. In the Notes in Table IIIB add "CPP Corrugated Polypropylene (CPP) pipe with smooth interior".

- Page 445 Article 542.03. In the fourth column in Table IIIB (metric) change the heading for Type 5 pipe from "CPE" to "CPP".
- Page 445 Article 542.03. In the Notes in Table IIIB (metric) change "PE Polyethylene (PE) pipe with a smooth interior" to "CPP Corrugated Polypropylene (CPP) pipe with smooth interior".
- Page 449 Article 542.04(f)(2). In the third line of the second paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)".
- Page 544 Article 639.03. In the first sentence of the first paragraph change "AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, Traffic Signals," to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals,"".
- Page 546 Article 640.03. In the first sentence of the first paragraph change "AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals" to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals"".
- Page 548 Article 641.03. In the first sentence of the first paragraph change "AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaire and Traffic Signals," to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals,"".
- Page 621 Article 727.03. In the first sentence of the third paragraph change "AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals" to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals"".
- Page 629 Article 734.03(a). In the fourth line of the second paragraph change "AASHTO T 99 (Method C)" to "Illinois Modified AASHTO T 99 (Method C)".
- Page 649 Article 801.02. In the first sentence of the first paragraph change "AASHTO's Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals" to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals"".
- Page 742 Article 1003.04(c). Under Gradation in the table change "(see Article 1003.02(c))" to "(see Article 1003.01(c))".
- Page 755 Article 1004.03(b). Revise the third sentence of the first paragraph to read "For Class A (seal or cover coat), and other binder courses, the coarse aggregate shall be Class C quality or better."

- Page 809 Article 1020.04(e). In the third line of the first paragraph change "ITP SCC-3" to "ITP SCC-4".
- Page 945 Article 1069.05. In the first sentence of the tenth paragraph change ""Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals"" to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals"".
- Page 961 Article 1070.04(b)(1). In the third sentence of the first paragraph change ""Standard Specifications of Structural Supports for Highway Signs, Luminaires and Traffic Signals" published by AASHTO" to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals"".
- Page 989 Article 1077.01. In the second sentence of the first paragraph change "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, as published by AASHTO" to "AASHTO "LRFD Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals"".
- Page 1121 Article 1103.13(a). In the first line of the first paragraph change "Bridge Deck Approach Slabs." to "Bridge Deck and Approach Slabs.".

80364

## COARSE AGGREGATE QUALITY (BDE)

Effective: July 1, 2015

Revise Article 1004.01(b) of the Standard Specifications to read:

“(b) Quality. The coarse aggregate shall be according to the quality standards listed in the following table.

COARSE AGGREGATE QUALITY				
QUALITY TEST	CLASS			
	A	B	C	D
Na <sub>2</sub> SO <sub>4</sub> Soundness 5 Cycle, ITP 104 <sup>1/</sup> , % Loss max.	15	15	20	25 <sup>2/</sup>
Los Angeles Abrasion, ITP 96 <sup>11/</sup> , % Loss max.	40 <sup>3/</sup>	40 <sup>4/</sup>	40 <sup>5/</sup>	45
Minus No. 200 (75 µm) Sieve Material, ITP 11	1.0 <sup>6/</sup>	---	2.5 <sup>7/</sup>	---
Deleterious Materials <sup>10/</sup>				
Shale, % max.	1.0	2.0	4.0 <sup>8/</sup>	---
Clay Lumps, % max.	0.25	0.5	0.5 <sup>8/</sup>	---
Coal & Lignite, % max.	0.25	---	---	---
Soft & Unsound Fragments, % max.	4.0	6.0	8.0 <sup>8/</sup>	---
Other Deleterious, % max.	4.0 <sup>9/</sup>	2.0	2.0 <sup>8/</sup>	---
Total Deleterious, % max.	5.0	6.0	10.0 <sup>8/</sup>	---
Oil-Stained Aggregate <sup>10/</sup> , % max	5.0	---	---	

1/ Does not apply to crushed concrete.

2/ For aggregate surface course and aggregate shoulders, the maximum percent loss shall be 30.

3/ For portland cement concrete, the maximum percent loss shall be 45.

4/ Does not apply to crushed slag or crushed steel slag.

5/ For hot-mix asphalt (HMA) binder mixtures, except when used as surface course, the maximum percent loss shall be 45.

6/ For crushed aggregate, if the material finer than the No. 200 (75 µm) sieve consists of the dust from fracture, essentially free from clay or silt, this percentage may be increased to 2.5.

7/ Does not apply to aggregates for HMA binder mixtures.

8/ Does not apply to Class A seal and cover coats.

9/ Includes deleterious chert. In gravel and crushed gravel aggregate, deleterious chert shall be the lightweight fraction separated in a 2.35 heavy media separation. In crushed stone aggregate, deleterious chert shall be the lightweight fraction separated in a 2.55 heavy media separation. Tests shall be run according to ITP 113.

10/ Test shall be run according to ITP 203.

11/ Does not apply to crushed slag.

All varieties of chert contained in gravel coarse aggregate for portland cement concrete, whether crushed or uncrushed, pure or impure, and irrespective of color, will be classed as chert and shall not be present in the total aggregate in excess of 25 percent by weight (mass).

Aggregates used in Class BS concrete (except when poured on subgrade), Class PS concrete, and Class PC concrete (bridge superstructure products only, excluding the approach slab) shall contain no more than two percent by weight (mass) of deleterious materials. Deleterious materials shall include substances whose disintegration is accompanied by an increase in volume which may cause spalling of the concrete.”

**WORKING DAYS (BDE)**

Effective: January 1, 2002

The Contractor shall complete the work within 40 working days.

80071

**GRANULAR BACKFILL FOR STRUCTURES**

Effective: April 19, 2012

Revised: October 30, 2012

Revise Section 586 of the Standard Specifications to read:

**SECTION 586. GRANULAR BACKFILL FOR STRUCTURES**

**586.01 Description.** This work shall consist of furnishing, transporting and placing granular backfill for abutment structures.

**586.02 Materials.** Materials shall be according to the following.

Item	Article/Section
(a) Fine Aggregate.....	1003.04
(b) Coarse Aggregates .....	1004.05

**CONSTRUCTION REQUIREMENTS**

**586.03 General.** This work shall be done according to Article 502.10 except as modified below. The backfill volume shall be backfilled, with granular material as specified in Article 586.02, to the required elevation as shown in the contract plans. The backfill volume shall be placed in convenient lifts for the full width to be backfilled. Unless otherwise specified in the contract plans, mechanical compaction will not be required. A deposit of gravel or crushed stone placed behind drain holes shall not be required. All drains not covered by geocomposite wall drains or other devices to prevent loss of backfill material shall be covered by sufficient filter fabric material meeting the requirements of Section 1080 and Section 282 with either 6 or 8 oz/sq yd (200 or 270 g/sq m) material allowed, with free edges overlapping the drain hole by at least 12 in. (300 mm) in all directions.

The granular backfill shall be brought to the finished grade as shown in the contract plans. When concrete is to be cast on top of the granular backfill, the Contractor, subject to approval of the Engineer, may prepare the top surface of the fill to receive the concrete as he/she deems necessary for satisfactory placement at no additional cost to the Department.

**586.04 Method of Measurement.** This work will be measured for payment as follows.

- (a) Contract Quantities. The requirements for the use of contract quantities shall conform to Article 202.07(a).
- (b) Measured Quantities. This work will be measured for payment in place and the volume computed in cubic yards (cubic meters). The volume will be determined by the method of average end areas behind the abutment.

**586.05 Basis of Payment.** This work will be paid for at the contract unit price per cubic yard (cubic meter) for GRANULAR BACKFILL FOR STRUCTURES.

|

# Grundy County Prevailing Wage for July 2015

(See explanation of column headings at bottom of wages)

Trade Name	RG	TYP	C	Base	FRMAN	M-F>8	OSA	OSH	H/W	Pensn	Vac	Trng	
ASBESTOS ABT-GEN	ALL			39.400	39.950	1.5	1.5	2.0	13.98	10.72	0.000	0.500	
ASBESTOS ABT-MEC	BLD			36.340	38.840	1.5	1.5	2.0	11.47	10.96	0.000	0.720	
BOILERMAKER	BLD			47.070	51.300	2.0	2.0	2.0	6.970	18.13	0.000	0.400	
BRICK MASON	BLD			43.780	48.160	1.5	1.5	2.0	10.05	14.43	0.000	1.030	
CARPENTER	ALL			44.350	48.790	1.5	1.5	2.0	11.79	16.40	0.000	0.630	
CEMENT MASON	ALL			41.000	43.000	2.0	1.5	2.0	9.900	18.34	0.000	0.500	
CERAMIC TILE FNSHER	BLD			36.810	0.000	1.5	1.5	2.0	10.55	9.230	0.000	0.770	
COMMUNICATION TECH	BLD			32.250	33.750	1.5	1.5	2.0	13.42	11.32	0.000	0.720	
ELECTRIC PWR EQMT OP	ALL			46.100	51.100	1.5	1.5	2.0	10.76	14.87	0.000	0.460	
ELECTRIC PWR GRNDMAN	ALL			37.050	52.500	1.5	2.0	2.0	8.630	12.28	0.000	0.370	
ELECTRIC PWR LINEMAN	ALL			47.500	52.500	1.5	2.0	1.5	10.76	14.87	0.000	0.460	
ELECTRICIAN	BLD			40.000	43.600	1.5	1.5	2.0	14.77	16.39	0.000	1.200	
ELEVATOR CONSTRUCTOR	BLD			41.690	46.900	2.0	2.0	2.0	13.57	14.21	3.340	0.600	
GLAZIER	BLD			40.500	42.000	1.5	2.0	2.0	13.14	16.99	0.000	0.940	
HT/FROST INSULATOR	BLD			48.450	50.950	1.5	1.5	2.0	11.47	12.16	0.000	0.720	
IRON WORKER	ALL			41.500	43.580	2.0	2.0	2.0	10.04	22.81	0.000	0.850	
LABORER	ALL			39.200	39.950	1.5	1.5	2.0	13.98	10.72	0.000	0.500	
LATHER	ALL			42.520	46.770	1.5	1.5	2.0	13.29	12.76	0.000	0.630	
MACHINIST	BLD			45.350	47.850	1.5	1.5	2.0	7.260	8.950	1.850	0.000	
MARBLE FINISHERS	ALL			32.400	34.320	1.5	1.5	2.0	10.05	13.75	0.000	0.620	
MARBLE MASON	BLD			43.030	47.330	1.5	1.5	2.0	10.05	14.10	0.000	0.780	
MATERIAL TESTER I	ALL			29.200	0.000	1.5	1.5	2.0	13.98	10.72	0.000	0.500	
MATERIALS TESTER II	ALL			34.200	0.000	1.5	1.5	2.0	13.98	10.72	0.000	0.500	
MILLWRIGHT	ALL			44.350	48.790	1.5	1.5	2.0	11.79	16.40	0.000	0.630	
OPERATING ENGINEER	BLD 1			48.100	52.100	2.0	2.0	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	BLD 2			46.800	52.100	2.0	2.0	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	BLD 3			44.250	52.100	2.0	2.0	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	BLD 4			42.500	52.100	2.0	2.0	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	BLD 5			51.850	52.100	2.0	2.0	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	BLD 6			49.100	52.100	2.0	2.0	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	BLD 7			51.100	52.100	2.0	2.0	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	FLT			36.000	36.000	1.5	1.5	2.0	17.10	11.80	1.900	1.250	
OPERATING ENGINEER	HWY 1			46.300	50.300	1.5	1.5	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	HWY 2			45.750	50.300	1.5	1.5	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	HWY 3			43.700	50.300	1.5	1.5	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	HWY 4			42.300	50.300	1.5	1.5	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	HWY 5			41.100	50.300	1.5	1.5	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	HWY 6			49.300	50.300	1.5	1.5	2.0	17.55	12.65	1.900	1.250	
OPERATING ENGINEER	HWY 7			47.300	50.300	1.5	1.5	2.0	17.55	12.65	1.900	1.250	
PAINTER	ALL			41.750	46.500	1.5	1.5	1.5	11.50	11.10	0.000	0.770	
PAINTER SIGNS	BLD			33.920	38.090	1.5	1.5	1.5	2.600	2.710	0.000	0.000	
PILEDRIVER	ALL			44.350	48.790	1.5	1.5	2.0	11.79	16.40	0.000	0.630	
PIPEFITTER	BLD			46.000	49.000	1.5	1.5	2.0	9.000	15.85	0.000	1.780	
PLASTERER	BLD			43.430	46.040	1.5	1.5	2.0	13.05	14.43	0.000	1.020	
PLUMBER	BLD			46.650	48.650	1.5	1.5	2.0	13.18	11.46	0.000	0.880	
ROOFER	BLD			31.410	33.410	1.5	1.5	2.0	8.280	10.54	0.000	0.530	
SHEETMETAL WORKER	BLD			44.720	46.720	1.5	1.5	2.0	10.65	13.31	0.000	0.820	
SIGN HANGER	ALL			22.990	25.290	1.5	1.5	2.0	3.790	2.500	0.000	0.000	
SPRINKLER FITTER	BLD			49.200	51.200	1.5	1.5	2.0	11.75	9.650	0.000	0.550	
STONE MASON	BLD			43.780	48.160	1.5	1.5	2.0	10.05	14.43	0.000	1.030	
SURVEY WORKER	-> NOT IN EFFECT			ALL	37.000	37.750	1.5	1.5	2.0	12.97	9.930	0.000	0.500
TERRAZZO FINISHER	BLD			38.040	0.000	1.5	1.5	2.0	10.55	11.22	0.000	0.720	
TERRAZZO MASON	BLD			41.880	44.880	1.5	1.5	2.0	10.55	12.51	0.000	0.940	
TILE MASON	BLD			43.840	47.840	1.5	1.5	2.0	10.55	11.40	0.000	0.990	
TRUCK DRIVER	ALL 1			35.650	36.200	1.5	1.5	2.0	7.250	6.319	0.000	0.250	
TRUCK DRIVER	ALL 2			35.800	36.200	1.5	1.5	2.0	7.250	6.319	0.000	0.250	
TRUCK DRIVER	ALL 3			36.000	36.200	1.5	1.5	2.0	7.250	6.319	0.000	0.250	
TRUCK DRIVER	ALL 4			36.200	36.200	1.5	1.5	2.0	7.250	6.319	0.000	0.250	
TUCKPOINTER	BLD			43.800	44.800	1.5	1.5	2.0	8.280	13.49	0.000	0.670	

Legend: RG (Region)

TYP (Trade Type - All,Highway,Building,Floating,Oil & Chip,Rivers)

C (Class)

Base (Base Wage Rate)

FRMAN (Foreman Rate)

M-F>8 (OT required for any hour greater than 8 worked each day, Mon through Fri.)

OSA (Overtime (OT) is required for every hour worked on Saturday)

OSH (Overtime is required for every hour worked on Sunday and Holidays)

H/W (Health & Welfare Insurance)

Pensn (Pension)

Vac (Vacation)

Trng (Training)

## Explanations

### GRUNDY COUNTY

PLUMBERS & PIPEFITTERS (WEST) - That part of the county West of Rt. 47 excluding the City of Morris.

The following list is considered as those days for which holiday rates of wages for work performed apply: New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day, Christmas Day and Veterans Day in some classifications/counties. Generally, any of these holidays which fall on a Sunday is celebrated on the following Monday. This then makes work performed on that Monday payable at the appropriate overtime rate for holiday pay. Common practice in a given local may alter certain days of celebration. If in doubt, please check with IDOL.

### EXPLANATION OF CLASSES

ASBESTOS - GENERAL - removal of asbestos material/mold and hazardous materials from any place in a building, including mechanical systems where those mechanical systems are to be removed. This includes the removal of asbestos materials/mold and hazardous materials from ductwork or pipes in a building when the building is to be demolished at the time or at some close future date.

ASBESTOS - MECHANICAL - removal of asbestos material from mechanical systems, such as pipes, ducts, and boilers, where the mechanical systems are to remain.

### CERAMIC TILE FINISHER

The grouting, cleaning, and polishing of all classes of tile, whether for interior or exterior purposes, all burned, glazed or unglazed products; all composition materials, granite tiles, warning detectable tiles, cement tiles, epoxy composite materials, pavers, glass, mosaics, fiberglass, and all substitute materials, for tile made in tile-like units; all mixtures in tile like form of cement, metals, and other materials that are for and intended for use as a finished floor surface, stair treads, promenade roofs, walks, walls, ceilings, swimming pools, and all other places where tile is to form a finished interior or exterior. The mixing of all setting mortars including but not limited to thin-set mortars, epoxies, wall mud, and any other sand and cement mixtures or adhesives when used in the preparation, installation, repair, or maintenance of tile and/or similar materials. The handling and unloading of all sand, cement, lime, tile, fixtures, equipment, adhesives, or any other materials to be used in the preparation, installation, repair, or maintenance of tile and/or similar materials. Ceramic Tile Finishers shall fill all joints and voids regardless of method on all tile work, particularly and especially after installation of said tile work. Application of any and all protective coverings to all types of tile installations including, but not be limited to, all soap compounds, paper products, tapes, and all polyethylene coverings, plywood, masonite, cardboard, and any new type of products that may be used to protect tile installations, Blastrac equipment, and all floor scarifying equipment used in preparing floors to receive tile. The clean-up and removal of all waste and materials. All demolition of existing tile floors and walls to be re-tiled.

### COMMUNICATIONS TECHNICIAN

Installation, operation, inspection, maintenance, repair and service of radio, television, recording, voice, sound and vision production and reproduction, telephone and telephone interconnect, facsimile, equipment and appliances used for domestic, commercial, educational and entertainment purposes, pulling of wire through conduit but not the installation of conduit.

### MARBLE FINISHER

Loading and unloading trucks, distribution of all materials (all stone, sand, etc.), stocking of floors with material, performing all rigging for heavy work, the handling of all material that may be needed for the installation of such materials, building of scaffolding, polishing if needed, patching, waxing of material if damaged, pointing up, caulking, grouting and cleaning of marble, holding water on diamond or Carborundum blade or saw for setters cutting, use of tub saw or any other saw needed for preparation of material, drilling of holes for wires that anchor material set by setters, mixing up of molding plaster for installation of material, mixing up thin set for the installation of material, mixing up of sand to cement for the installation of material and such other work as may be required in helping a Marble Setter in the handling of all

material in the erection or installation of interior marble, slate, travertine, art marble, serpentine, alberene stone, blue stone, granite and other stones (meaning as to stone any foreign or domestic materials as are specified and used in building interiors and exteriors and customarily known as stone in the trade), carrara, sanionyx, vitrolite and similar opaque glass and the laying of all marble tile, terrazzo tile, slate tile and precast tile, steps, risers treads, base, or any other materials that may be used as substitutes for any of the aforementioned materials and which are used on interior and exterior which are installed in a similar manner.

MATERIAL TESTER I: Hand coring and drilling for testing of materials; field inspection of uncured concrete and asphalt.

MATERIAL TESTER II: Field inspection of welds, structural steel, fireproofing, masonry, soil, facade, reinforcing steel, formwork, cured concrete, and concrete and asphalt batch plants; adjusting proportions of bituminous mixtures.

### OPERATING ENGINEER - BUILDING

Class 1. Asphalt Plant; Asphalt Spreader; Autograde; Backhoes with Caisson Attachment; Batch Plant; Benoto (requires Two Engineers); Boiler and Throttle Valve; Caisson Rigs; Central Redi-Mix Plant; Combination Back Hoe Front End-loader Machine; Compressor and Throttle Valve; Concrete Breaker (Truck Mounted); Concrete Conveyor; Concrete Conveyor (Truck Mounted); Concrete Paver over 27E cu. ft.; Concrete Paver 27E cu. ft. and Under; Concrete Placer; Concrete Placing Boom; Concrete Pump (Truck Mounted); Concrete Tower; Cranes, All; Cranes, Hammerhead; Cranes, (GCI and similar Type); Creter Crane; Spider Crane; Crusher, Stone, etc.; Derricks, All; Derricks, Traveling; Formless Curb and Gutter Machine; Grader, Elevating; Grouting Machines; Heavy Duty Self-Propelled Transporter or Prime Mover; Highlift Shovels or Front Endloader 2-1/4 yd. and over; Hoists, Elevators, outside type rack and pinion and similar machines; Hoists, One, Two and Three Drum; Hoists, Two Tugger One Floor; Hydraulic Backhoes; Hydraulic Boom Trucks; Hydro Vac (and similar equipment); Locomotives, All; Motor Patrol; Lubrication Technician; Manipulators; Pile Drivers and Skid Rig; Post Hole Digger; Pre-Stress Machine; Pump Cretes Dual Ram; Pump Cretes; Squeeze Cretes-Screw Type Pumps; Gypsum Bulker and Pump; Raised and Blind Hole Drill; Roto Mill Grinder; Scoops - Tractor Drawn; Slip-Form Paver; Straddle Buggies; Operation of Tie Back Machine; Tournapull; Tractor with Boom and Side Boom; Trenching Machines.

Class 2. Boilers; Broom, All Power Propelled; Bulldozers; Concrete Mixer (Two Bag and Over); Conveyor, Portable; Forklift Trucks; Highlift Shovels or Front Endloaders under 2-1/4 yd.; Hoists, Automatic; Hoists, Inside Elevators; Hoists, Sewer Dragging Machine; Hoists, Tugger Single Drum; Laser Screed; Rock Drill (Self-Propelled); Rock Drill (Truck Mounted); Rollers, All; Steam Generators; Tractors, All; Tractor Drawn Vibratory Roller; Winch Trucks with "A" Frame.

Class 3. Air Compressor; Combination Small Equipment Operator; Generators; Heaters, Mechanical; Hoists, Inside Elevators (remodeling or renovation work); Hydraulic Power Units (Pile Driving, Extracting, and Drilling); Pumps, over 3" (1 to 3 not to exceed a total of 300 ft.); Low Boys; Pumps, Well Points; Welding Machines (2 through 5); Winches, 4 Small Electric Drill Winches.

Class 4. Bobcats and/or other Skid Steer Loaders; Oilers; and Brick Forklift.

Class 5. Assistant Craft Foreman.

Class 6. Gradall.

Class 7. Mechanics; Welders.

### OPERATING ENGINEERS - HIGHWAY CONSTRUCTION

Class 1. Asphalt Plant; Asphalt Heater and Planer Combination; Asphalt Heater Scarfire; Asphalt Spreader; Autograde/GOMACO or other similar type machines; ABG Paver; Backhoes with Caisson Attachment; Ballast Regulator; Belt Loader; Caisson Rigs; Car Dumper; Central Redi-Mix Plant; Combination Backhoe Front Endloader Machine, (1 cu. yd. Backhoe Bucket or over or with attachments); Concrete Breaker (Truck Mounted); Concrete Conveyor; Concrete Paver over 27E cu. ft.; Concrete Placer; Concrete Tube Float; Cranes, all attachments; Cranes, Tower Cranes of all types; Creter Crane; Spider Crane; Crusher, Stone, etc.; Derricks, All; Derrick Boats; Derricks, Traveling; Dredges;

Elevators, Outside type Rack & Pinion and Similar Machines; Formless Curb and Gutter Machine; Grader, Elevating; Grader, Motor Grader, Motor Patrol, Auto Patrol, Form Grader, Pull Grader, Subgrader; Guard Rail Post Driver Truck Mounted; Hoists, One, Two and Three Drum; Heavy Duty Self-Propelled Transporter or Prime Mover; Hydraulic Backhoes; Backhoes with shear attachments up to 40' of boom reach; Lubrication Technician; Manipulators; Mucking Machine; Pile Drivers and Skid Rig; Pre-Stress Machine; Pump Cretes Dual Ram; Rock Drill - Crawler or Skid Rig; Rock Drill - Truck Mounted; Rock/Track Tamper; Roto Mill Grinder; Slip-Form Paver; Snow Melters; Soil Test Drill Rig (Truck Mounted); Straddle Buggies; Hydraulic Telescoping Form (Tunnel); Operation of Tieback Machine; Tractor Drawn Belt Loader; Tractor Drawn Belt Loader (with attached pusher - two engineers); Tractor with Boom; Tractaire with Attachments; Traffic Barrier Transfer Machine; Trenching; Truck Mounted Concrete Pump with Boom; Raised or Blind Hole Drills (Tunnel Shaft); Underground Boring and/or Mining Machines 5 ft. in diameter and over tunnel, etc; Underground Boring and/or Mining Machines under 5 ft. in diameter; Wheel Excavator; Widener (APSCO).

Class 2. Batch Plant; Bituminous Mixer; Boiler and Throttle Valve; Bulldozers; Car Loader Trailing Conveyors; Combination Backhoe Front Endloader Machine (Less than 1 cu. yd. Backhoe Bucket or over with attachments); Compressor and Throttle Valve; Compressor, Common Receiver (3); Concrete Breaker or Hydro Hammer; Concrete Grinding Machine; Concrete Mixer or Paver 7S Series to and including 27 cu. ft.; Concrete Spreader; Concrete Curing Machine, Burlap Machine, Belting Machine and Sealing Machine; Concrete Wheel Saw; Conveyor Muck Cars (Haglund or Similar Type); Drills, All; Finishing Machine - Concrete; Highlift Shovels or Front Endloader; Hoist - Sewer Dragging Machine; Hydraulic Boom Trucks (All Attachments); Hydro-Blasters; Hydro Excavating (excluding hose work); Laser Screed; All Locomotives, Dinky; Off-Road Hauling Units (including articulating) Non Self-Loading Ejection Dump; Pump Cretes: Squeeze Cretes - Screw Type Pumps, Gypsum Bulker and Pump; Roller, Asphalt; Rotary Snow Plows; Rototiller, Seaman, etc., self-propelled; Self-Propelled Compactor; Spreader - Chip - Stone, etc.; Scraper - Single/Twin Engine/Push and Pull; Scraper - Prime Mover in Tandem (Regardless of Size); Tractors pulling attachments, Sheeps Foot, Disc, Compactor, etc.; Tug Boats.

Class 3. Boilers; Brooms, All Power Propelled; Cement Supply Tender; Compressor, Common Receiver (2); Concrete Mixer (Two Bag and Over); Conveyor, Portable; Farm-Type Tractors Used for Mowing, Seeding, etc.; Forklift Trucks; Grouting Machine; Hoists, Automatic; Hoists, All Elevators; Hoists, Tugger Single Drum; Jeep Diggers; Low Boys; Pipe Jacking Machines; Post-Hole Digger; Power Saw, Concrete Power Driven; Pug Mills; Rollers, other than Asphalt; Seed and Straw Blower; Steam Generators; Stump Machine; Winch Trucks with "A" Frame; Work Boats; Tamper-Form-Motor Driven.

Class 4. Air Compressor; Combination - Small Equipment Operator; Directional Boring Machine; Generators; Heaters, Mechanical; Hydraulic Power Unit (Pile Driving, Extracting, or Drilling); Light Plants, All (1 through 5); Pumps, over 3" (1 to 3 not to exceed a total of 300 ft.); Pumps, Well Points; Vacuum Trucks (excluding hose work); Welding Machines (2 through 5); Winches, 4 Small Electric Drill Winches.

Class 5. SkidSteer Loader (all); Brick Forklifts; Oilers.

Class 6. Field Mechanics and Field Welders

Class 7. Dowell Machine with Air Compressor; Gradall and machines of like nature.

SURVEY WORKER - Operated survey equipment including data collectors, G.P.S. and robotic instruments, as well as conventional levels and transits.

TRUCK DRIVER - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION

Class 1. Two or three Axle Trucks. A-frame Truck when used for transportation purposes; Air Compressors and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Carry-alls; Fork Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors 2-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Power Mower Tractors; Self-propelled Chip Spreader; Skipman; Slurry Trucks, 2-man operation; Slurry Truck Conveyor Operation, 2 or 3 man; Teamsters Unskilled dumpman; and Truck Drivers hauling warning lights, barricades, and portable toilets on the job site.

Class 2. Four axle trucks; Dump Crets and Adgetors under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turntrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-mix Plant Hopper Operator, and Winch Trucks, 2 Axles.

Class 3. Five axle trucks; Dump Crets and Adgetors 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turntrailers or turnapulls when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, 1-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long; Slurry trucks, 1-man operation; Winch trucks, 3 axles or more; Mechanic--Truck Welder and Truck Painter.

Class 4. Six axle trucks; Dual-purpose vehicles, such as mounted crane trucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front.

TERRAZZO FINISHER

The handling of sand, cement, marble chips, and all other materials that may be used by the Mosaic Terrazzo Mechanic, and the mixing, grinding, grouting, cleaning and sealing of all Marble, Mosaic, and Terrazzo work, floors, base, stairs, and wainscoting by hand or machine, and in addition, assisting and aiding Marble, Masonic, and Terrazzo Mechanics.

Other Classifications of Work:

For definitions of classifications not otherwise set out, the Department generally has on file such definitions which are available. If a task to be performed is not subject to one of the classifications of pay set out, the Department will upon being contacted state which neighboring county has such a classification and provide such rate, such rate being deemed to exist by reference in this document. If no neighboring county rate applies to the task, the Department shall undertake a special determination, such special determination being then deemed to have existed under this determination. If a project requires these, or any classification not listed, please contact IDOL at 217-782-1710 for wage rates or clarifications.

LANDSCAPING

Landscaping work falls under the existing classifications for laborer, operating engineer and truck driver. The work performed by landscape plantsman and landscape laborer is covered by the existing classification of laborer. The work performed by landscape operators (regardless of equipment used or its size) is covered by the classifications of operating engineer. The work performed by landscape truck drivers (regardless of size of truck driven) is covered by the classifications of truck driver.

MATERIAL TESTER & MATERIAL TESTER/INSPECTOR I AND II

Notwithstanding the difference in the classification title, the classification entitled "Material Tester I" involves the same job duties as the classification entitled "Material Tester/Inspector I". Likewise, the classification entitled "Material Tester II" involves the same job duties as the classification entitled "Material Tester/Inspector II".



**ADJUSTMENT ITEMS**      **EX**      **PR**

Structure To Be Adjusted		Baseline		<b>PR</b>
Structure To Be Cleaned		Centerline		<b>PR</b>
Main Structure To Be Filled		Centerline Break Circle		<b>PR</b>
Structure To Be Filled		Baseline Symbol		<b>PR</b>
Structure To Be Filled Special		Centerline Symbol		<b>PR</b>
Structure To Be Removed		PI Indicator		<b>PR</b>
Structure To Be Reconstructed		Point Indicator		<b>PR</b>
Structure To Be Reconstructed Special		Horizontal Curve Data (Half Size)	 <b>PR</b>	
Frame and Grate To Be Adjusted		<b>BOUNDARIES ITEMS</b>	<b>EX</b>	<b>PR</b>
Frame and Lid To Be Adjusted		Dashed Property Line		<b>PR</b>
Domestic Service Box To Be Adjusted		Solid Property/Lot Line		<b>PR</b>
Valve Vault To Be Adjusted		Section/Grant Line		<b>PR</b>
Special Adjustment		Quarter Section Line		<b>PR</b>
Item To Be Abandoned		Quarter/Quarter Section Line		<b>PR</b>
Item To Be Moved		County/Township Line		<b>PR</b>
Item To Be Relocated		State Line		<b>PR</b>
Pavement Removal and Replacement		Iron Pipe Found		<b>PR</b>

**CONTOUR ITEMS**

Approx. Index Line		<b>EX</b>
Approx. Intermediate Line		<b>EX</b>
Index Contour		<b>PR</b>
Intermediate Contour		<b>PR</b>

**DRAINAGE ITEMS**

Channel or Stream Line		<b>EX</b>
Culvert Line		<b>PR</b>
Grading & Shaping Ditches		<b>PR</b>
Drainage Boundary Line		<b>PR</b>
Paved Ditch		<b>PR</b>
Aggregate Ditch		<b>PR</b>
Pipe Underdrain		<b>PR</b>
Storm Sewer		<b>PR</b>

**BOUNDARIES ITEMS**

Dashed Property Line		<b>EX</b>
Solid Property/Lot Line		<b>PR</b>
Section/Grant Line		<b>PR</b>
Quarter Section Line		<b>PR</b>
Quarter/Quarter Section Line		<b>PR</b>
County/Township Line		<b>PR</b>
State Line		<b>PR</b>
Iron Pipe Found		<b>PR</b>
Iron Pipe Set		<b>PR</b>
Survey Marker		<b>PR</b>
Property Line Symbol		<b>PR</b>
Same Ownership Symbol (Half Size)		<b>PR</b>
Northwest Quarter Corner (Half Size)		<b>PR</b>
Section Corner (Half Size)		<b>PR</b>
Southeast Quarter Corner (Half Size)		<b>PR</b>

**CONTOUR ITEMS**

Flowline		<b>EX</b>
Ditch Check		<b>PR</b>
Headwall		<b>PR</b>
Inlet		<b>PR</b>
Manhole		<b>PR</b>
Summit		<b>PR</b>
Roadway Ditch Flow		<b>PR</b>
Swale		<b>PR</b>
Catch Basin		<b>PR</b>
Culvert End Section		<b>PR</b>
Water Surface Indicator		<b>PR</b>
Riprap		<b>PR</b>

**STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS**

--	--	--	--	--	--	--	--	--	--	--	--

**EROSION & SEDIMENT CONTROL ITEMS**

Cleaning & Grading Limits		<b>PR</b>
Dike		<b>PR</b>
Erosion Control Fence		<b>PR</b>
Perimeter Erosion Barrier		<b>PR</b>
Temporary Fence		<b>PR</b>
Ditch Check Temporary		<b>PR</b>
Ditch Check Permanent		<b>PR</b>
Inlet & Pipe Protection		<b>PR</b>
Sediment Basin		<b>PR</b>
Erosion Control Blanket		<b>PR</b>
Fabric Formed Concrete Revetment Mat		<b>PR</b>
Turf Reinforcement Mat		<b>PR</b>
Mulch Temporary		<b>PR</b>
Mulch Method 1		<b>PR</b>
Mulch Method 2 Stabilized		<b>PR</b>
Mulch Method 3 Hydraulic		<b>PR</b>

**NON-HIGHWAY IMPROVEMENT ITEMS**

Noise Attn./Levee		<b>EX</b>	<b>PR</b>
Field Line		<b>EX</b>	<b>PR</b>
Fence		<b>EX</b>	<b>PR</b>
Base of Levee		<b>EX</b>	<b>PR</b>
Mailbox		<b>EX</b>	<b>PR</b>
Multiple Mailboxes		<b>EX</b>	<b>PR</b>
Pay Telephone		<b>EX</b>	<b>PR</b>
Advertising Sign		<b>EX</b>	<b>PR</b>
<b>LANDSCAPING ITEMS</b>			
Contour Mounding Line		<b>EX</b>	<b>PR</b>
Fence		<b>EX</b>	<b>PR</b>
Fence Post		<b>EX</b>	<b>PR</b>
Shrubs		<b>EX</b>	<b>PR</b>
Mowline		<b>EX</b>	<b>PR</b>
Perennial Plants		<b>EX</b>	<b>PR</b>
Seeding Class 2		<b>EX</b>	<b>PR</b>
Seeding Class 2A		<b>EX</b>	<b>PR</b>
Seeding Class 4		<b>EX</b>	<b>PR</b>
Seeding Class 4 & 5 Combined		<b>EX</b>	<b>PR</b>

**EXISTING LANDSCAPING ITEMS (contd.)**

Seeding Class 5		<b>EX</b>	<b>PR</b>
Seeding Class 7		<b>EX</b>	<b>PR</b>
Seedlings Type 1		<b>EX</b>	<b>PR</b>
Seedlings Type 2		<b>EX</b>	<b>PR</b>
Sodding		<b>EX</b>	<b>PR</b>
Mowstake w/Sign		<b>EX</b>	<b>PR</b>
Tree Trunk Protection		<b>EX</b>	<b>PR</b>
Evergreen Tree		<b>EX</b>	<b>PR</b>
Shade Tree		<b>EX</b>	<b>PR</b>
<b>LIGHTING</b>			
Duct		<b>EX</b>	<b>PR</b>
Conduit		<b>EX</b>	<b>PR</b>
Electrical Aerial Cable		<b>EX</b>	<b>PR</b>
Electrical Buried Cable		<b>EX</b>	<b>PR</b>
Controller		<b>EX</b>	<b>PR</b>
Underpass Luminaire		<b>EX</b>	<b>PR</b>
Power Pole		<b>EX</b>	<b>PR</b>

**STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS**  
(Sheet 3 of 8)  
**STANDARD 000001-06**

Illinois Department of Transportation  
PASSED January 1, 2011  
Michael Beard  
ENGINEER OF POLICY AND PROCEDURES  
APPROVED January 1, 2011  
S. J. [Signature]  
ENGINEER OF DESIGN AND ENVIRONMENT  
ISSUED 1-1-97

**LIGHTING**  
**(cont'd.)**

**EX**

**PR**

Pull Point



Handhole



Heavy Duty Handhole



Junction Box



Light Unit Comb.



Electrical Ground



Traffic Flow Arrow



High Mast Pole  
(trifit Size)



Light Unit-1



**PAVEMENT (MISC.)**

**EX**

**PR**

Keyed Long. Joint



Keyed Long. Joint w/Tie Bars



Sawed Long. Joint w/Tie Bars



Bituminous Shoulder



Bituminous Taper



Stabilized Driveway



Widening



**PAVEMENT MARKINGS**

**EX**

**PR**

Bike Lane Symbol



Bike Lane Text



Handicap Symbol



RR Crossing



Raised Marker Amber 1 Way



Raised Marker Amber 2 Way



Raised Marker Crystal 1 Way



Two Way Turn Left



Shoulder Diag. Pattern



Skip-Dash White



Skip-Dash Yellow



Stop Line



Solid Line



Double Centerline



Dotted Lines



CL 2Ln 2Way  
RRPM 12.2 m (40') o.c.



CL 2Ln 2Way  
RRPM 80' (24.4 m) o.c.



CL Multilane Div.  
RRPM 40' (12.2 m) o.c.



CL Multilane Div.  
RRPM 80' (24.4 m) o.c.



CL Multilane Div. Dbl.  
RRPM 80' (24.4 m) o.c.



CL Multilane Undiv.



Two Way Turn Left Line



**STANDARD SYMBOLS,  
ABBREVIATIONS  
AND PATTERNS**  
(Sheet 4 of 8)

STANDARD 000001-06

Illinois Department of Transportation

PASSED January 1, 2011  
Michael Board  
ENGINEER OF POLICY AND PROCEDURES  
APPROVED January 1, 2011  
S. J. [Signature]  
ENGINEER OF DESIGN AND ENVIRONMENT

ISSUED 1-1-97

**PAVEMENT MARKINGS**  
(contd.)

- Urban Combination Left
- Urban Combination Right
- Urban Left Turn Arrow
- Urban Right Turn Arrow
- Urban Left Turn Only
- Urban Right Turn Only
- Urban Thru Only
- Urban U-Turn
- Urban Combined U-Turn
- Rural Combination Left
- Rural Combination Right
- Rural Left Turn Arrow
- Rural Right Turn Arrow
- Rural Left Turn Only
- Rural Right Turn Only
- Rural Thru Only

**EX**




**PR**




**RAILROAD ITEMS**

- Abandoned Railroad
- Railroad
- Railroad Point
- Control Box
- Crossing Gate
- Flashing Signal
- Railroad Cant., Mast Arm
- Crossbuck

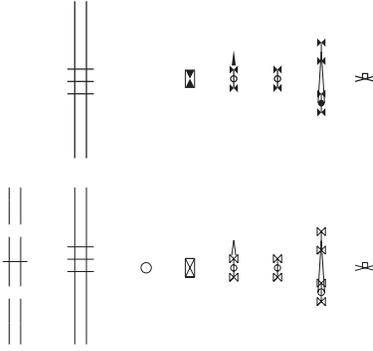


**REMOVAL ITEMS**

- Removal Tic
- Bituminous Removal
- Hatch Pattern
- Tree Removal Single



**RIGHT OF WAY ITEMS**

- Future ROW Corner Monument
- ROW Marker
- ROW Line
- Easement
- Temporary Easement

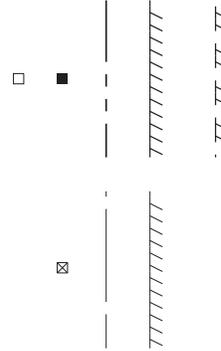

Illinois Department of Transportation  
 PASSED January 1, 2011  
 Michael Board  
 ENGINEER OF POLICY AND PROCEDURES  
 APPROVED January 1, 2011  
 [Signature]  
 ENGINEER OF DESIGN AND ENVIRONMENT

**STANDARD SYMBOLS,  
 ABBREVIATIONS  
 AND PATTERNS**  
 (Sheet 5 of 8)  
 STANDARD 000001-06

**RIGHT OF WAY ITEMS**  
(contd.)

Access Control Line — AC — AC — AC — AC —  
 Access Control Line & ROW — AC — AC — AC — AC —  
 Access Control Line & ROW with Fence — AR — AC — AC — AC —  
 Excess ROW Line — XS —

**ROADWAY PLAN ITEMS**

Cable Barrier — PR  
 Concrete Barrier — PR  
 Edge of Pavement — PR  
 Bit Shoulders, Medians and C&G Line — PR  
 Aggregate Shoulder — PR  
 Sidewalks, Driveways — PR  
 Guardrail — PR  
 Guardrail Post — PR  
 Traffic Sign — PR  
 Corrugated Median — PR  
 Impact Attenuator — PR  
 North Arrow with District Office (Half Size) — PR  
 Match Line — PR  
 Slope Limit Line — PR  
 Typical Cross-Section Line — PR

**ROADWAY PROFILES**

P.I. Indicator  
 Point Indicator  
 Earthworks Balance Point  
 Begin Point  
 Vert. Curve Data  
 Ditch Profile Left Side  
 Ditch Profile Right Side  
 Roadway Profile Line  
 Storm Sewer Profile Left Side  
 Storm Sewer Profile Right Side

PR

EX

PR

EX

PR

EX

PR

EX

PR

EX

PR

**SIGNING ITEMS**  
(contd.)

Reverse Left W1-4L (Half Size)  
 Reverse Right W1-4R (Half Size)  
 Two Way Traffic Sign W6-3 (Half Size)  
 Detour Ahead W20-200 (Half Size)  
 Left Lane Closed Ahead W20-5L(0) (Half Size)  
 Right Lane Closed Ahead W20-5R(0) (Half Size)  
 Road Closed Ahead W20-3(0) (Half Size)  
 Road Construction Ahead W20-1(0) (Half Size)  
 Single Lane Ahead (Half Size)  
 Transition Left W4-2L (Half Size)  
 Transition Right W4-2R (Half Size)

EX

PR

EX

PR

EX

PR

EX

PR

EX

PR

EX

PR

EX

Illinois Department of Transportation  
 PASSED January 1, 2011  
 ENGINEER OF POLICY AND PROCEDURES  
 APPROVED January 1, 2011  
 ENGINEER OF DESIGN AND ENVIRONMENT

**STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS**  
 STANDARD 000001-06  
 (Sheet 6 of 8)

**SIGNING ITEMS**  
(cont'd.)

One Way Arrow Lrg. W1-6-(0)  
(Half Size)

Two Way Arrow Large W1-7-(0)  
(Half Size)

Detour M4-10L-(0)  
(Half Size)

Detour M4-10R-(0)  
(Half Size)

One Way Left R6-1L  
(Half Size)

One Way Right R6-1R  
(Half Size)

Left Turn Lane R3-1100L  
(Half Size)

Keep Left R4-TAL  
(Half Size)

Keep Left R4-TBL  
(Half Size)

Keep Right R4-TAR  
(Half Size)

Keep Right R4-TBR  
(Half Size)

Stop Here On Red R10-6-AL  
(Half Size)

Stop Here On Red R10-6-AR  
(Half Size)

No Left Turn R3-2  
(Half Size)

No Right Turn R3-1  
(Half Size)

Road Closed R11-2  
(Half Size)

Road Closed Thru Traffic R11-2  
(Half Size)

**EX**

**PR**



**STRUCTURES ITEMS**

Box Culvert Barrel

Box Culvert Headwall

Bridge Pier

Bridge

Retaining Wall

Temporary Sheet Piling

**EX**

**PR**



**TRAFFIC SHEET ITEMS**

Cable Number

Left Turn Green

Left Turn Yellow

Signal Backplate

Signal Section 8' (200 mm)

Signal Section 12' (300 mm)

Walk/Don't Walk Letters

Walk/Don't Walk Symbols

**TRAFFIC SIGNAL ITEMS**

Galv. Steel Conduit

Underground Cable

Detector Loop Line

Detector Loop Large

Detector Loop Small

Detector Loop Quadrangle

**EX**

**PR**



**EX**

**PR**



**STANDARD SYMBOLS,  
ABBREVIATIONS  
AND PATTERNS**

(Sheet 7 of 8)

STANDARD 000001-06

Illinois Department of Transportation

PASSED January 1, 2011  
 ENGINEER OF POLICY AND PROCEDURES  
 APPROVED January 1, 2011  
 ENGINEER OF DESIGN AND ENVIRONMENT

ISSUED 1-1-97

**TRAFFIC SIGNAL ITEMS (contd.)**

Detector Raceway		
Aluminum Mast Arm		
Steel Mast Arm		
Veh. Detector Magnetic		
Conduit Splice		
Controller		
Gifbox Junction		
Wood Pole		
Temp. Signal Head		
Handhole		
Double Handhole		
Heavy Duty Handhole		
Junction Box		
Ped. Pushbutton Detector		
Ped. Signal Head		
Power Pole Service		
Priority Veh. Detector		
Signal Head		
Signal Head w/Backplate		
Signal Post		
Closed Circuit TV		
Video Detector System		

**UNDERGROUND UTILITY ITEMS**

Cable TV		
Electric Cable		
Fiber Optic		
Gas Pipe		
Oil Pipe		
Sanitary Sewer		
Telephone Cable		
Water Pipe		

**UTILITIES ITEMS**

Controller		
Double Handhole		
Fire Hydrant		
GuyWire or Deadman Anchor		
Handhole		
Heavy Duty Handhole		
Junction Box		
Light Pole		
Manhole		
Pipeline Warning Sign		
Power Pole		
Power Pole with Light		
Sanitary Sewer Cleanout		
Splice Box Above Ground		
Telephone Splice Box Above Ground		
Telephone Pole		

**UTILITY ITEMS (contd.)**

Traffic Signal		
Traffic Signal Control Box		
Water Meter		
Water Meter Valve Box		
Profile Line		
Aerial Power Line		

**VEGETATION ITEMS**


Deciduous Tree		
Bush or Shrub		
Evergreen Tree		
Stump		
Orchard/Nursery Line		
Vegetation Line		
Woods & Bush Line		

**WATER FEATURE ITEMS**

Stream or Drainage Ditch		
Waters Edge		
Water Surface Indicator		
Water Point		
Disappearing Ditch		
Marsh		
Marsh/Swamp Boundary		


Illinois Department of Transportation  
 PASSED January 1, 2011  
 ENGINEER OF POLICY AND PROCEDURES  
 APPROVED January 1, 2011  
 ENGINEER OF DESIGN AND ENVIRONMENT

**STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS**  
 (Sheet 8 of 8)  
 STANDARD 000001-06

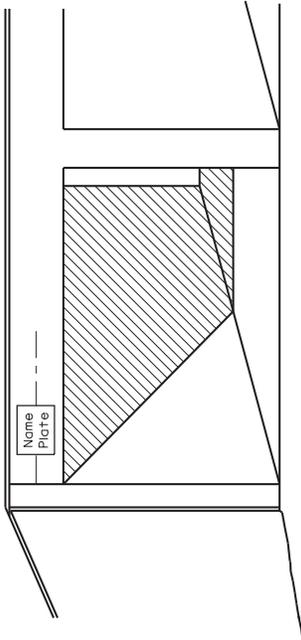

**FOR MULTI-SPAN CULVERTS**


(Unless otherwise noted on the plans, name plates are not required for structures less than 20' (6.1 m) in length)

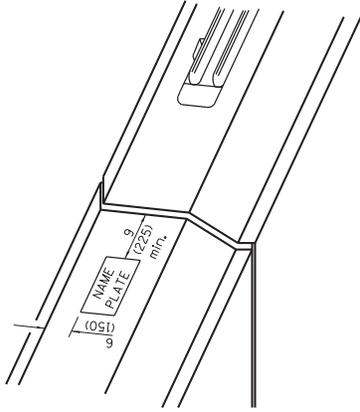


**FOR PARAPET AND END POST MOUNTED**

**FOR PARAPET**

(When Dog Ear Wing is used)

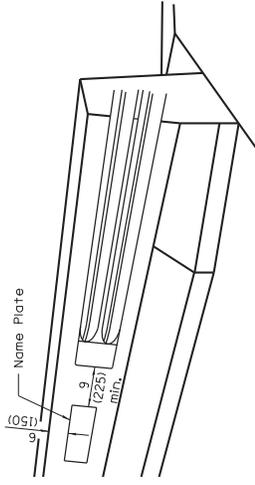

**FOR TRUSSES**

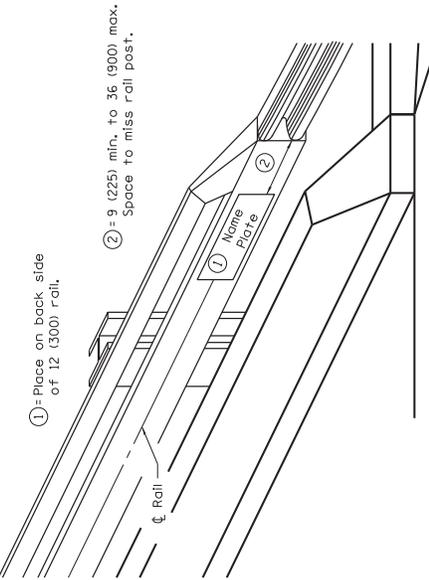


**FOR STEEL RAILS**

For column type piers,  $\phi$  of column nearest approaching traffic. For solid piers, 3'-0"  $\pm$  from end of pier closest to approaching traffic.

4'-0"  $\pm$  above crown of roadway elevation.

**FOR PIERS ON FAI ROUTES**

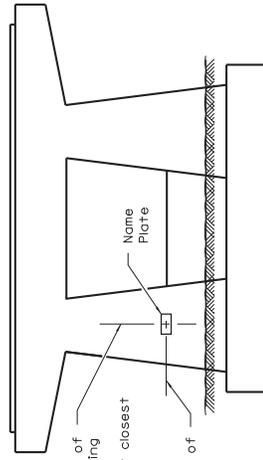

**GENERAL NOTES**

On one-way traffic structures, place name plate on right side of approach end. On two-way traffic structures, place name plate on right side of approach end while looking in the direction of increasing stationing.

All dimensions are in inches (millimeters) unless otherwise shown.

Illinois Department of Transportation  
 APPROVED January 1, 2009  
*Michael E. Anderson*  
 ENGINEER OF BRIDGES AND STRUCTURES  
 APPROVED January 1, 2009  
*Lee S. Ho*  
 ENGINEER OF DESIGN AND ENVIRONMENT


DATE	REVISIONS
1-1-09	Switched units to English (metric). Added pier detail.
1-1-02	Remove Placing note on sht. 2. Added Brnze to diag. note on sht. 1.

**NAME PLATE FOR BRIDGES**

(Sheet 1 of 2)


**STANDARD 515001-03**

Lettering for

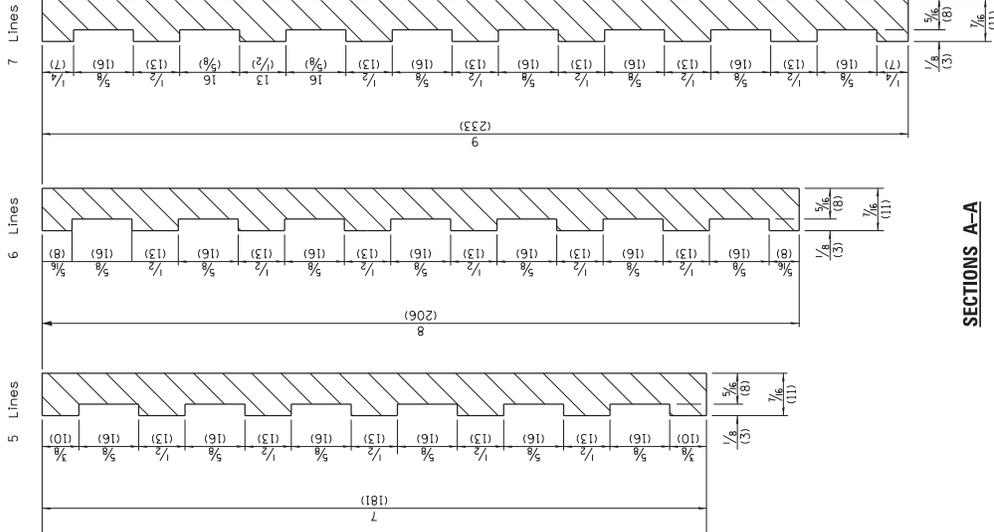

SECTIONS A-A

A ↙

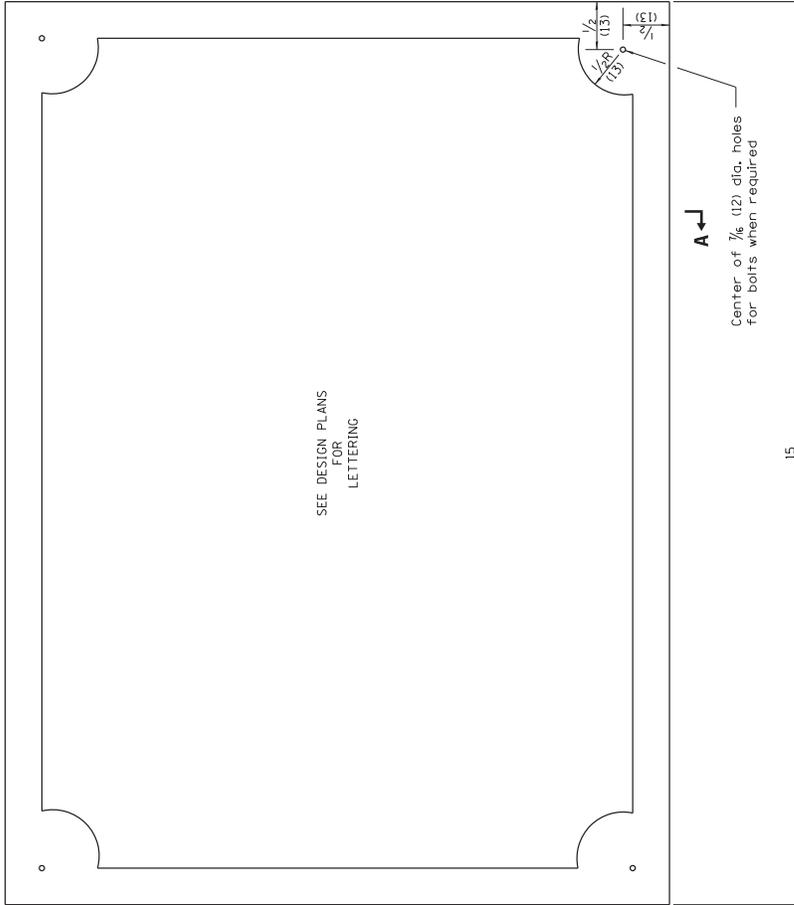

A ↙

Center of 7/16 (12) dia. holes for bolts when required

15 (380)



**NAME PLATE FOR BRIDGES**

(Sheet 2 of 2)

**STANDARD 515001-03**


NOTE  
Border and lettering:  
Raised 1/8 (3), square cut and not tapered.

Illinois Department of Transportation APPROVED <i>Joseph E. Anderson</i> ENGINEER OF BRIDGES AND STRUCTURES APPROVED <i>Lee E. Ho</i> ENGINEER OF DESIGN AND ENVIRONMENT	JANUARY 1, 2009 ENGINEER OF BRIDGES AND STRUCTURES	ISSUED 1-1-97
	APPROVED <i>Lee E. Ho</i> ENGINEER OF DESIGN AND ENVIRONMENT	JANUARY 1, 2009 ENGINEER OF DESIGN AND ENVIRONMENT

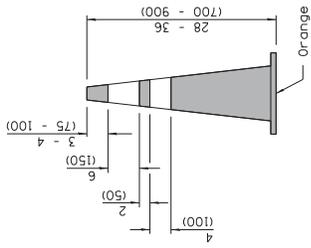


**REFLECTORIZED CONE FOR NIGHTTIME**  
 Orange  
 Posted speed < 45 mph


**REFLECTORIZED CONE FOR NIGHTTIME**  
 Orange  
 Posted speed ≥ 45 mph

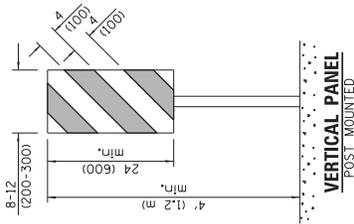


**VERTICAL PANEL POST-MOUNTED**

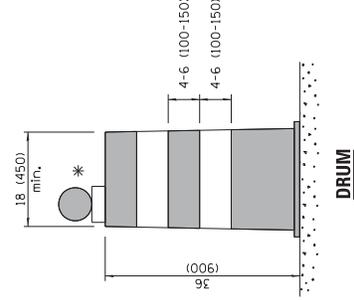


**DRUM**

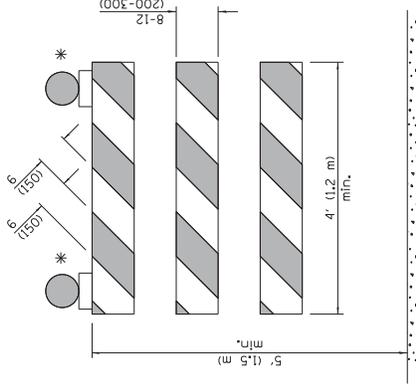


**TYPE III BARRICADE**

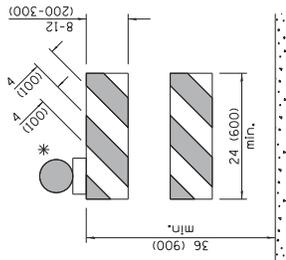


**TYPE II BARRICADE**

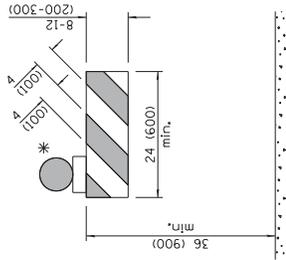


**TYPE I BARRICADE**

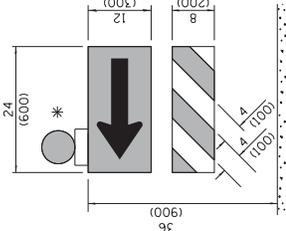

**DIRECTION INDICATOR BARRICADE**

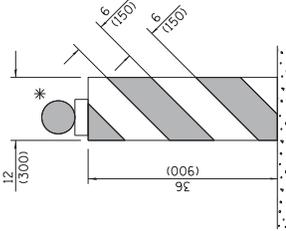

**VERTICAL BARRICADE**

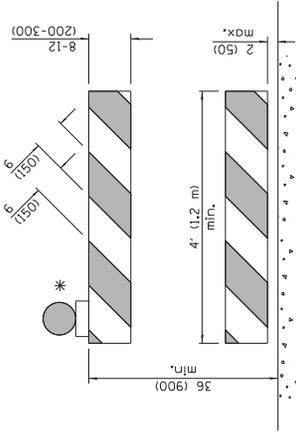

**DETECTABLE PEDESTRIAN CHANNELIZING BARRICADE**

\* Warning lights (if required)

**GENERAL NOTES**  
 All heights shown shall be measured above the pavement surface.  
 All dimensions are in inches (millimeters) unless otherwise shown.


DATE	REVISIONS
4-1-16	Add dim's to barricades. Rev. note for post mt. signs.
1-1-15	Rev. cone dths. Add WIZ-1103. Revised two sign numbers on sheet 2. Added note reg. PHOTO ENFORCED plaque.

**TRAFFIC CONTROL DEVICES**

(Sheet 1 of 3)


**STANDARD 701901-05**

Illinois Department of Transportation	ISSUED 1-1-97
APPROVED April 1, 2016	
ENGINEER OF OPERATIONS	
APPROVED April 1, 2016	
ENGINEER OF DESIGN AND ENVIRONMENT	

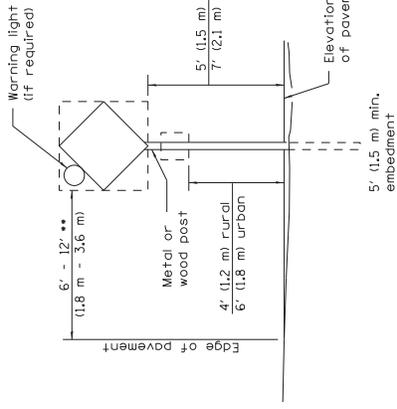


**POST MOUNTED SIGNS**

.. When curb or paved shoulder are present this dimension shall be 24 (600) to the face of curb or 6' (1.8 m) to the outside edge of the paved shoulder.

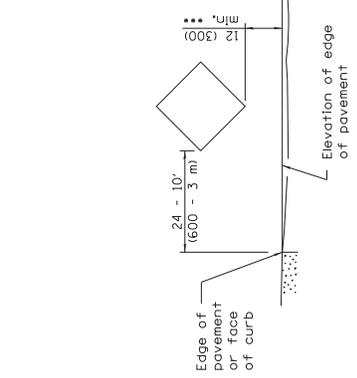

**SIGNS ON TEMPORARY SUPPORTS**

... When work operations exceed four days, this dimension shall be 5' (1.5 m) min. If located behind other devices, the height shall be sufficient to be seen completely above the devices.

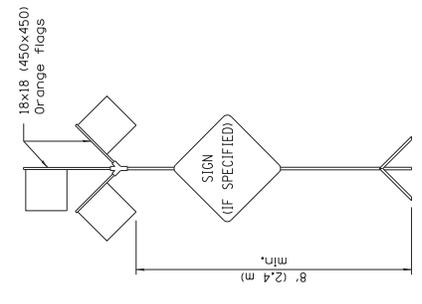

**HIGH LEVEL WARNING DEVICE**

ROAD CONSTRUCTION NEXT X MILES  
G20-1104(O)-6036

END CONSTRUCTION  
G20-1105(O)-6024

This signing is required for all projects 2 miles (3200 m) or more in length.  
ROAD CONSTRUCTION NEXT X MILES sign shall be placed 500' (150 m) in advance of project limits.  
END CONSTRUCTION sign shall be erected at the end of the job unless another job is within 2 miles (3200 m).  
Dual sign displays shall be utilized on multi-lane highways.

**WORK LIMIT SIGNING**



W21-1105(O)-3618  
R2-1-3648  
R10-1108p-3618  
R2-1106p-3618

Sign assembly as shown on Standards or as allowed by District Operations.




G20-1103(O)-6036


This sign shall be used when the above sign assembly is used.

**HIGHWAY CONSTRUCTION SPEED ZONE SIGNS**


.... R10-1108p shall only be used along roadways under the Jurisdiction of the State.

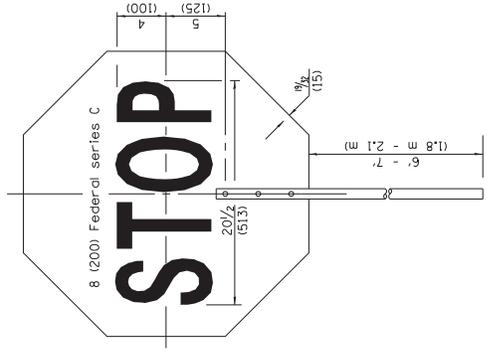

FRONT SIDE

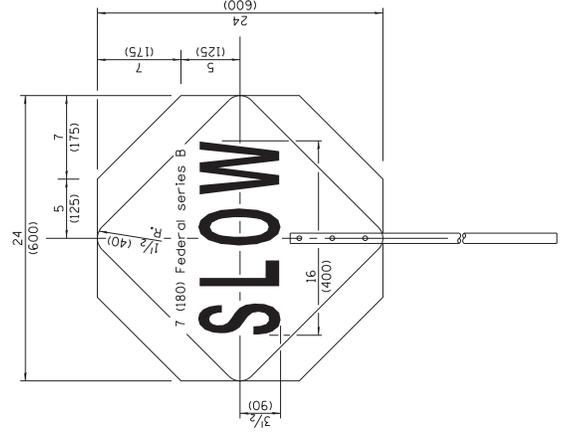

REVERSE SIDE

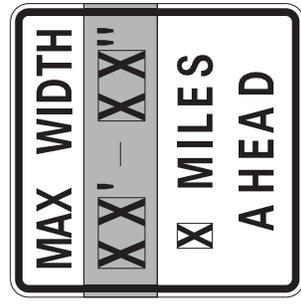

W12-1103-4848

**WIDTH RESTRICTION SIGN**

XX'-XX" width and X miles are variable.


Illinois Department of Transportation  
 APPROVED \_\_\_\_\_ 2016  
 ENGINEER OF OPERATIONS  
 APPROVED \_\_\_\_\_ 2016  
 ENGINEER OF DESIGN AND ENVIRONMENT  
 ISSUED 1-1-97

**FLAGGER TRAFFIC CONTROL SIGN**


**TRAFFIC CONTROL DEVICES**

(Sheet 2 of 3)

STANDARD 701901-05

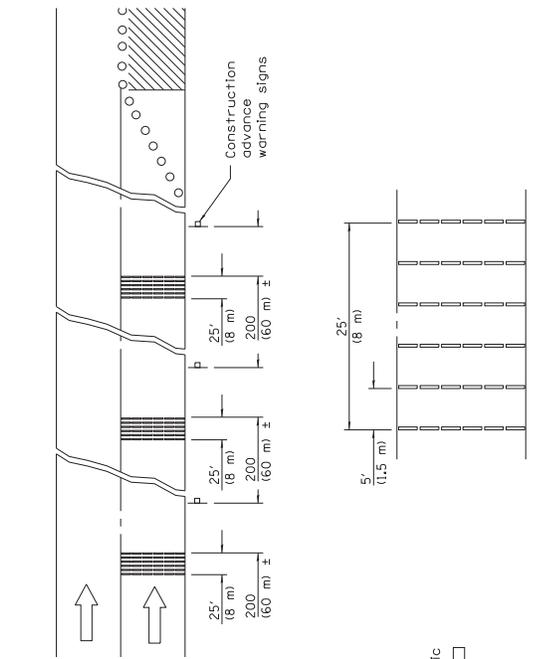


**TYPICAL INSTALLATION**

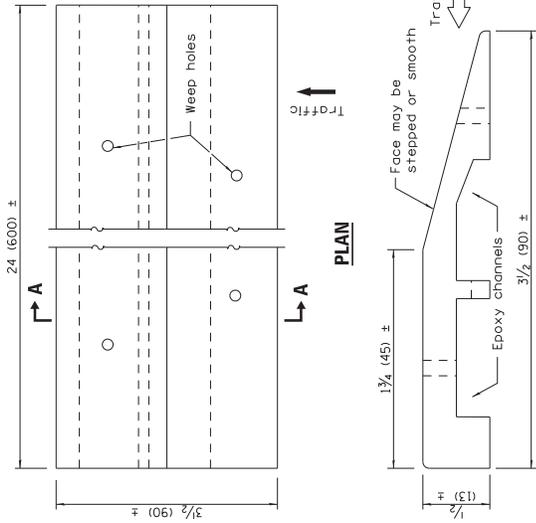


**SECTION A-A**

**TEMPORARY RUMBLE STRIPS**

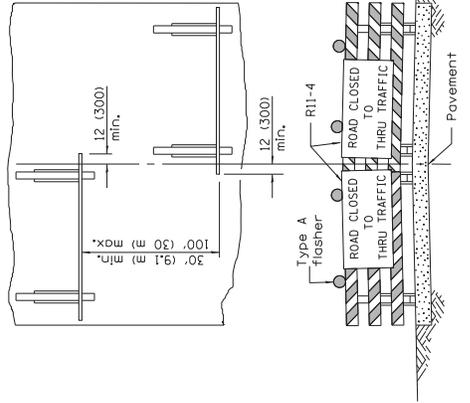

**ROAD CLOSED TO THRU TRAFFIC**

ReflectORIZED striping shall appear on both sides of the barricades. If a Type III barricade with an attached sign panel which meets NCHRP 350 is not available, the signs may be mounted on NCHRP 350 temporary sign supports directly in front of the barricade.

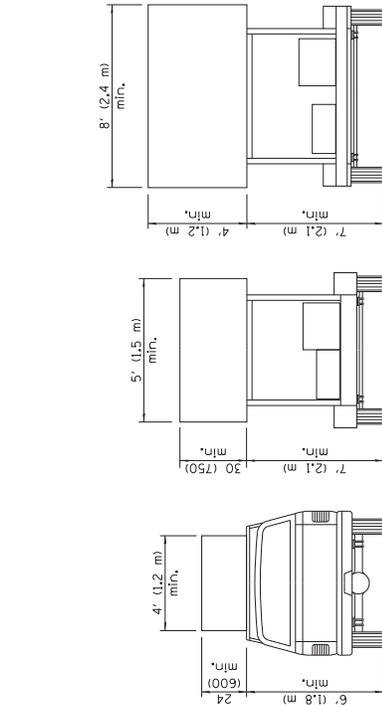


**TYPE A  
ROOF  
MOUNTED**

**TYPE B  
ROOF OR TRAILER  
MOUNTED**

**TYPE C  
TRAILER  
MOUNTED**

**ARROW BOARDS**

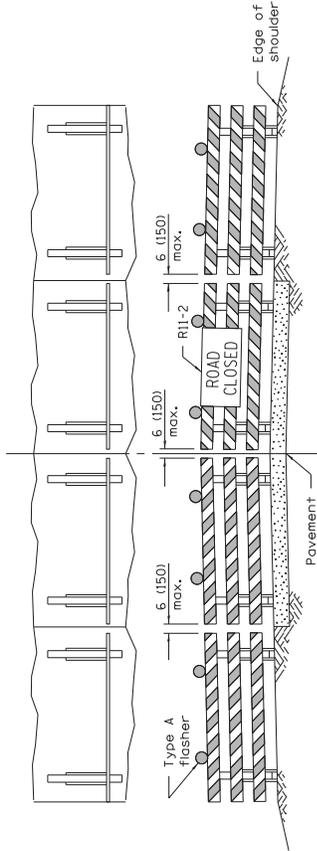

**ROAD CLOSED TO ALL TRAFFIC**

ReflectORIZED striping may be omitted on the back side of the barricades. If a Type III barricade with an attached sign panel which meets NCHRP 350 is not available, the sign may be mounted on an NCHRP 350 temporary sign support directly in front of the barricade.


**TYPICAL APPLICATIONS OF  
TYPE III BARRICADES CLOSING A ROAD**

	APPROVED	April 1, 2016	ISSUED	1-1-97
	ENGINEER OF OPERATIONS	<i>[Signature]</i>	APPROVED	April 1, 2016
ENGINEER OF DESIGN AND ENVIRONMENT				

**TRAFFIC CONTROL  
DEVICES**


(Sheet 3 of 3)

**STANDARD 701901-05**

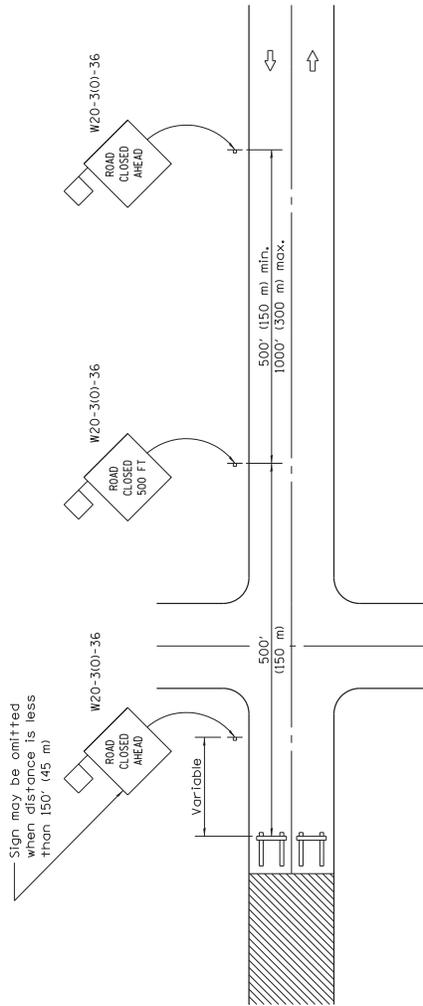

**CONDITION I**

When distance from closure to crossroad is less than 1500' (450 m)

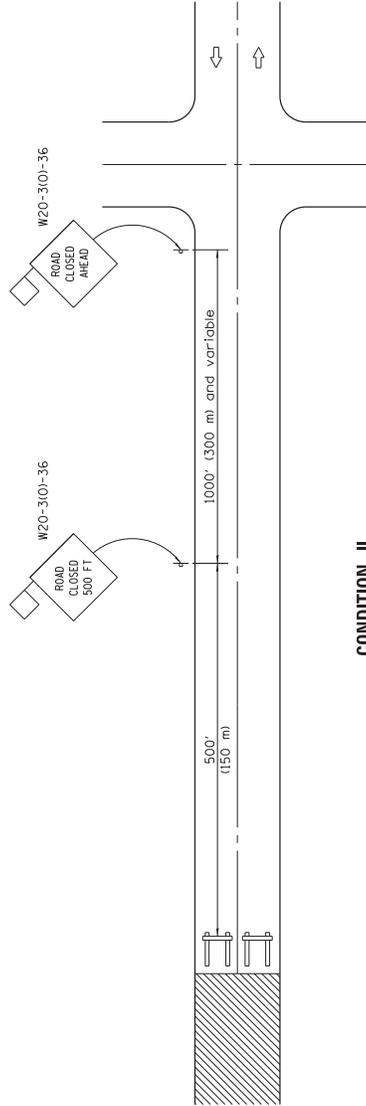

**CONDITION II**

When distance from closure to crossroad is greater than 1500' (450 m)

**SYMBOLS**



**GENERAL NOTES**

Type III Barricades and R11-2-4830 signs shall be positioned as shown in "Road Closed to All Traffic" detail on highway Standard 701301.

Two Type A Low Intensity Flashing Lights shall be used on each approach in advance of the work area during hours of darkness. One light shall be installed above the barricades and the other above the first advance warning sign.

All warning signs shall have minimum dimensions of 36 x 36 (900 x 900) and have a black legend on an orange reflectorized background.

When fluorescent signs are used, orange flags are not required.

Longitudinal dimensions may be adjusted to fit field conditions.

When the distance between the barricade and the intersection is between 1500' (450 m) and 2000' (600 m), the advance sign shall be placed at the intersection. When the distance between the barricade and the intersection is over 2000' (600 m), an additional sign shall be placed at the intersection. The additional sign shall give the distance to the barricade in miles or fractions of a mile.

All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
1-1-12	Omitted two notes from GENERAL NOTES.
1-1-09	Switched units to English (metric).

Work area  
Type III Barricade  
Sign with 18x18 (450x450) min. orange flag attached


Illinois Department of Transportation APPROVED: <i>David Jones</i> ENGINEER OF LOCAL ROADS AND STREETS APPROVED: <i>Scott Eddy</i> ENGINEER OF DESIGN AND ENVIRONMENT	ISSUED 1-1-97
---	---------------

**TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS**

**STANDARD B.L.R. 21-9**

**CONDITION I**  
**APPROACH TRAFFIC STOPPED**

**CONDITION II**  
**APPROACH TRAFFIC DOES NOT STOP**

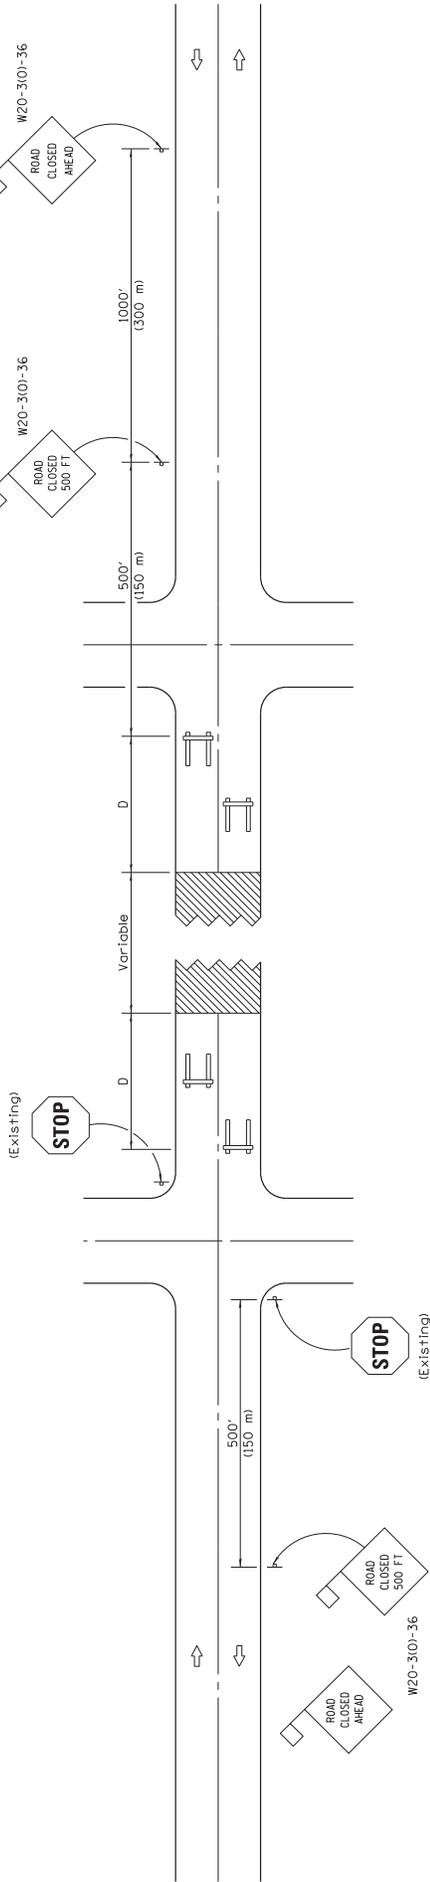

**SYMBOLS**

Work area



Type III Barricade



Sign with 18x18 (450x450) min. orange flag attached



**GENERAL NOTES**

Type III Barricades and R11-4-6030 signs shall be positioned as shown in the "Road Closed To All Traffic" detail on Highway Standard 701901. If the distance "D" exceeds 2000' (600 m), an additional set of barricades and R11-4-6030 shall be placed at each end of the work area.

Two Type A Low Intensity Flashing Lights shall be used on each approach in advance of the work area. One light shall be installed above each barricade. If only one barricade is required, the other light shall be installed above the first advance warning sign.

All warning signs shall have minimum dimensions of 36 x 36 (900 x 900) and have a black legend on an orange reflectorized background.

When fluorescent signs are used, orange flags are not required.

Longitudinal dimensions may be adjusted to fit field conditions.

All dimensions are in inches (millimeters) unless otherwise shown.

APPROVED	JANUARY 1, 2012	ILLINOIS DEPARTMENT OF TRANSPORTATION
APPROVED	JANUARY 1, 2012	ISSUED 1-1-97
APPROVED	JANUARY 1, 2012	ENGINEER OF LOCAL ROADS AND STREETS
APPROVED	JANUARY 1, 2012	ENGINEER OF DESIGN AND ENVIRONMENT

**TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS (TWO-LANE TWO WAY RURAL TRAFFIC) (ROAD CLOSED TO THRU TRAFFIC)**

**STANDARD B.L.R.-22-7**

DATE	REVISIONS
1-1-12	Omitted two notes from GENERAL NOTES.
1-1-09	Revised General Notes and switched units to English (metric).